



©2000-2010



RGOS®

RGNOS®



NPE RG-NPE40 RG-NPE60

NPE

 **È**
È **È** **È** **È**
È

- NPE
-
-
-
-




mún,
 S(M)E; of "aod


EoyU-


NPE $y_{\hat{S}}$

RG-NPExxx y₈

NPExxx yC

NPE



<http://www.ruijie.com.cn>



CD-ROM

CD-ROM

CD-ROM

CD-ROM



<http://www.ruijie.com.cn>



service@ruijie.com.cn



+86- 4008-111-000



0591-83057315



1

5

Apple
M1 Pro

Terminal Display

Terminal Display

Courier New

8.5

2

~

i



			1
1.1	NPE		1
1.1.1	NPE40		1
1.1.2	NPE60		2
1.2	NPE		4
1.2.1			4
1.2.2			4
1.2.3			4
1.2.4			5
1.2.5			5
1.2.6			5
1.2.7			5
			6
2.1			6
2.2			6
2.2.1	/		7
2.2.2			7
2.2.3			8
2.2.4			8
2.2.5			8
2.3			8
			10
3.1			10
3.2			10
3.2.1			11
3.2.2			11
3.3			11
3.4			11
3.5			12
			13
4.1			13
4.1.1			13
4.1.2			15
4.1.3			16
4.2			17
			18
5.1			18
5.2			18

NPE


1.1 NPE

1.1.1 NPE40

1.1.1.1 NPE40




1-1 NPE40

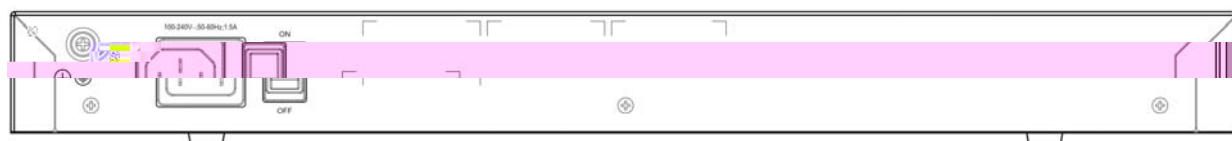

1-2 NPE40

		10Base-T/100Base-TX/1000Base-TX, 1000BASE-SX/LX/ZX
		RS-232
× H × D)	(W	440mm × 43.6mm × 400mm

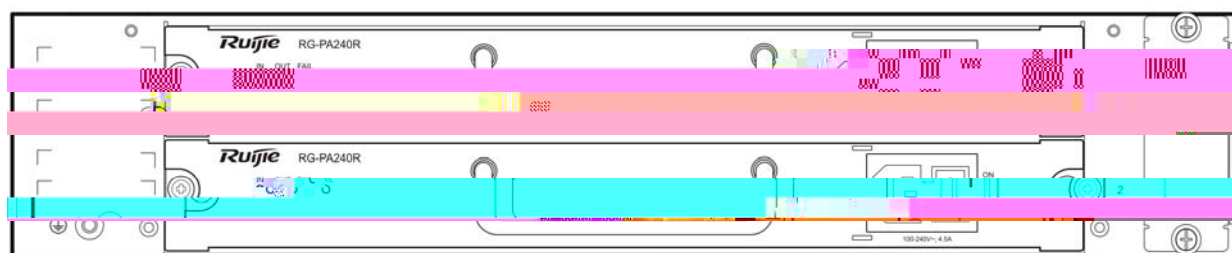

1-4 NPE60

1.1.2.2 NPE60

NPE60

	DDR2 SDRAM 2GB
	BOOTROM 2MB
	FLASH 512MB
I/O	WAN 4 LAN 4 LAN/WAN
	100M
	1
	10Base-T/100Base-TX/1000Base-TX, 1000BASE-SX/LX/ZX 10G BASE-SX/LX
	RS-232
(W × H × D)	440mm × 81mm × 420mm
	100-240V~;50-60Hz
	100W
	0~50
	10~90%RH

1.1.2.3 NPE60

Status	
0 7	LED

	Link ACT 10/100M Link 10/100M ACT
0F 7F	LED Link ACT Link
0SFP+ 1SFP+	LED Link ACT Link

1.2 NPE

1.2.1

NPE

- RJ45 ARP
- TCP/IP IP ICMP IGMP TCP UDP
- IP RIP(V1/V2) OSPF
- SNMP
- TELNET
- DHCP
- PPPoE
- X-MODEM
- NAT
-
- VRRP
- L2TP PPTP
- TFTP

1.2.2

-
-
- web CLI

1.2.3

- DEBUG

-
-
- Console
- TELNET
- TFTP

1.2.4

- IP
- PPP PAP CHAP
- MAC
- NAT

1.2.5

- DPI P2P IM
600
- / IP
Session

- • • • •

UPS

10



É

DOY'S NEWS,



!

® A 26, B/6 VNM (55E

SCU

2.2

- [illegible]

Cl2	0.01	0.3
-----	------	-----

2.2.3

-
-

-
-
-

-
-
-

2.2.4

-
-
-
-

2.2.5

-

19"

-
-
-

2.3

-

-
-

-
-

-
-
-
-

- HUB
-
-

PC

3.1

3.2

-
-

3.2.1


3.2.2


-
-
-

10cm

4.1


4.1.1

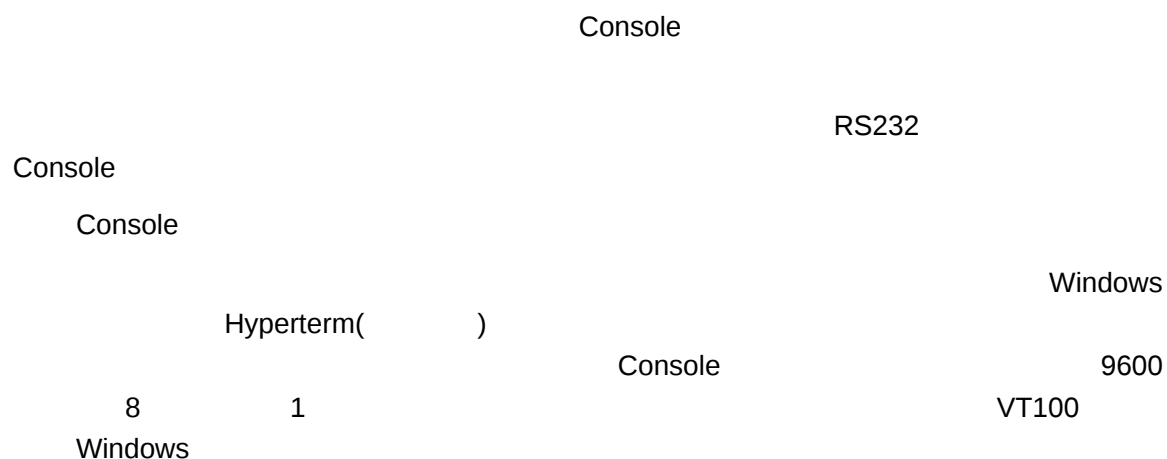

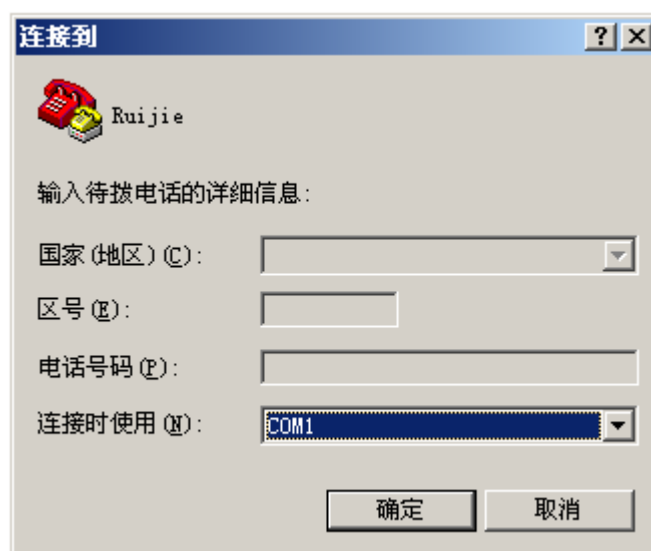

Console



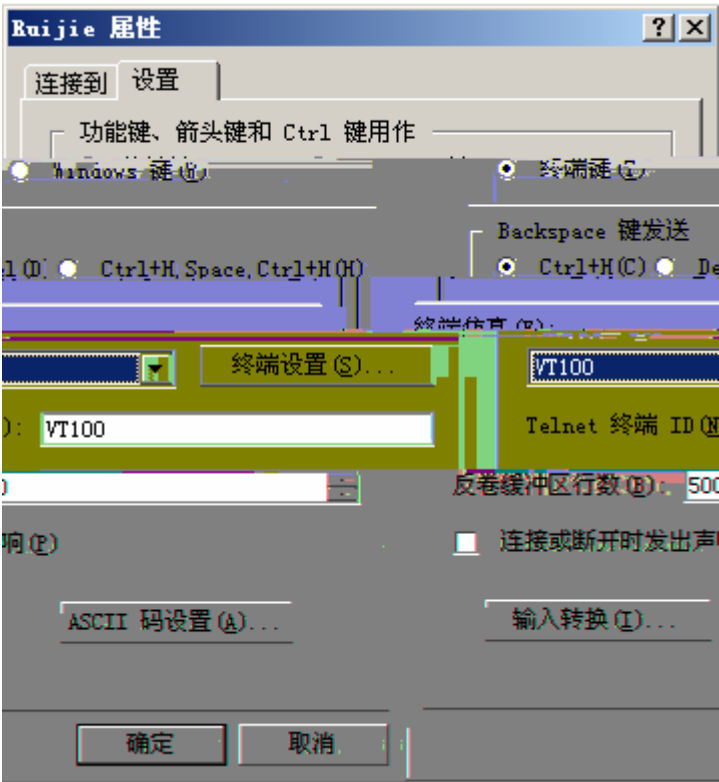

4.1.2

4.1.2.1

-
-

~ A!
B(“
hb((Wd

4.1.2.2

-
-

“ ON ”

4.1.2.3

-

-

“ ”

-

4.1.3

NPE40

System bootstrap ...

Boot Version: RGOS 10.3(4b7), Release(78528)

Nor Flash ID: 0x00010049, SIZE: 2097152Bytes

MTD_DRIVER-5-MTD_NAND_FOUND: 1 NAND chips(chip size : 536870912) detected

Press Ctrl+C to enter Boot Menu

Main Program File Name rgos.bin, Load Main Program ...

Executing program, launch at: 0x00010000

Ruijie General Operating System Software

Release Software (tm), RGOS 10.3(4b7), Release(78528), Compiled Thu Mar 4 19:35:43 CST
2010 by ngcf35

Copyright (c) 1998-2010s by Ruijie Networks.

All Rights Reserved.

Decompiling or Reverse Engineering is Not Allowed.

*Jan 1 00:00:29: %MTD_DRIVER-5-MTD_NAND_FOUND: 1 NAND chips(chip size : 536870912) detected

*Jan 1 00:00:48: %LINK-3-UPDOWN: Interface GigabitEthernet 0/2, changed state to up.

*Jan 1 00:00:48: %LINEPROTO-5-UPDOWN: Line protocol on Interface GigabitEthernet 0/2,
changed state to up.

*Jan 1 00:00:49: %LINK-3-UPDOWN: Interface GigabitEthernet 0/3, changed state to up.

*Jan 1 00:00:49: %LINEPROTO-5-UPDOWN: Line protocol on Interface GigabitEthernet 0/3,
changed state to up.

*Jan 1 00:00:50: %LINK-3-UPDOWN: Interface GigabitEthernet 0/1, changed state to up.

*Jan 1 00:00:50: %LINEPROTO-5-UPDOWN: Line protocol on Interface GigabitEthernet 0/1,
changed state to up.

*Jan 1 00:00:51: %LINK-3-UPDOWN: Interface GigabitEthernet 0/0, changed state to up.

