

WEB

IG\$EJK

AP\_3.0(1)B2P8

V(%)

)')(\$(' \$(

cf gpr^\_t © )') (



<https://www.ruijiery.com/>

<https://ocs.ruijie.com.cn/?p=smb>

<https://www.ruijie.com.cn/service.aspx>

7

4001-000-078

<http://bbs.ruijiery.com/>

<https://www.ruijie.com.cn/service/know.aspx>

[4001000078@ruijie.com.cn](mailto:4001000078@ruijie.com.cn)



1.

[]

[]

rospst

[ospst]

&

2.



/

---



3.



---

## 2

### 2.1

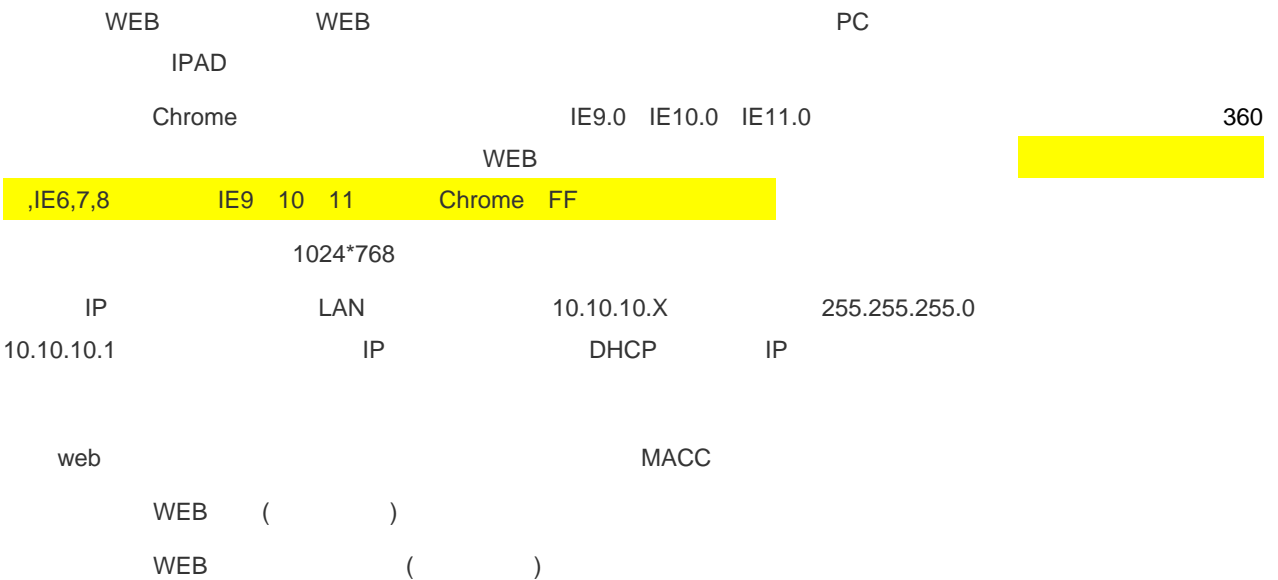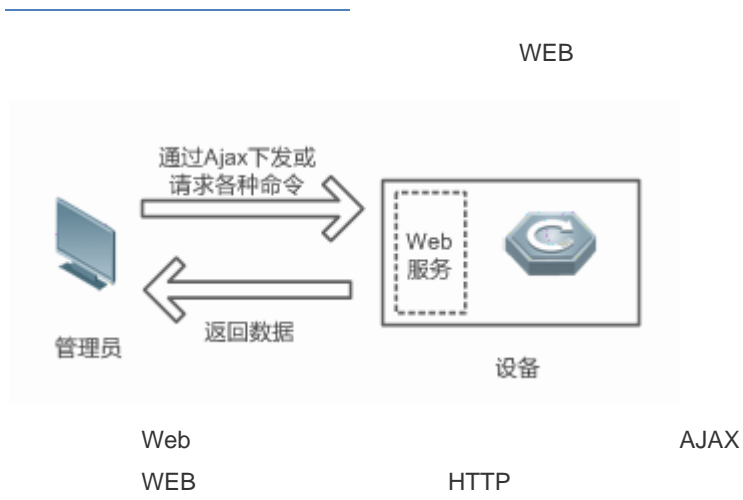

---


IP ( LAN 10.10.10.10)

Chrome  
web

10.10.10.10


web

admin

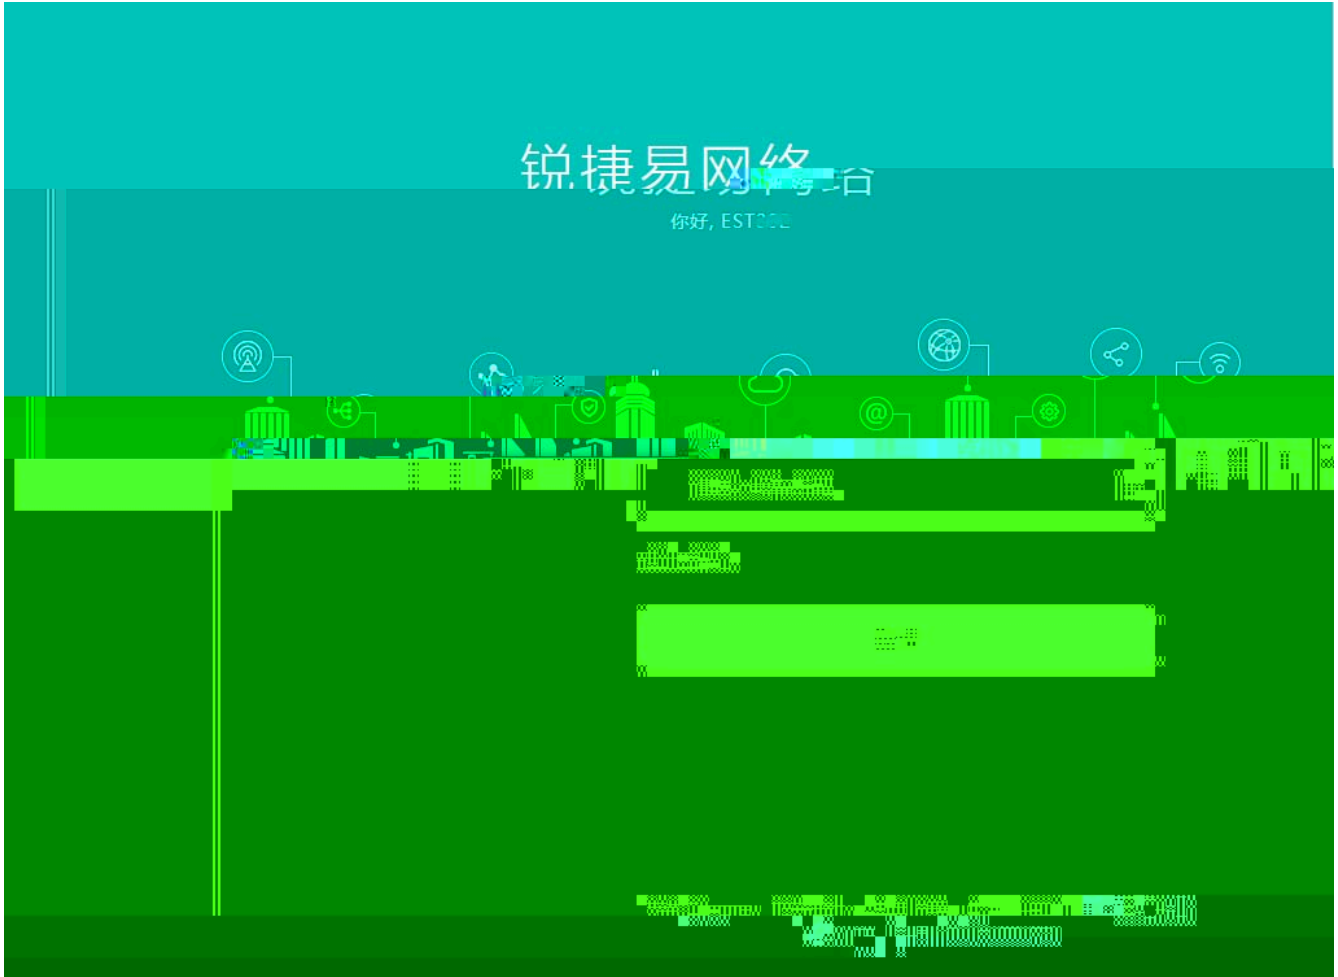

## 2.2

web

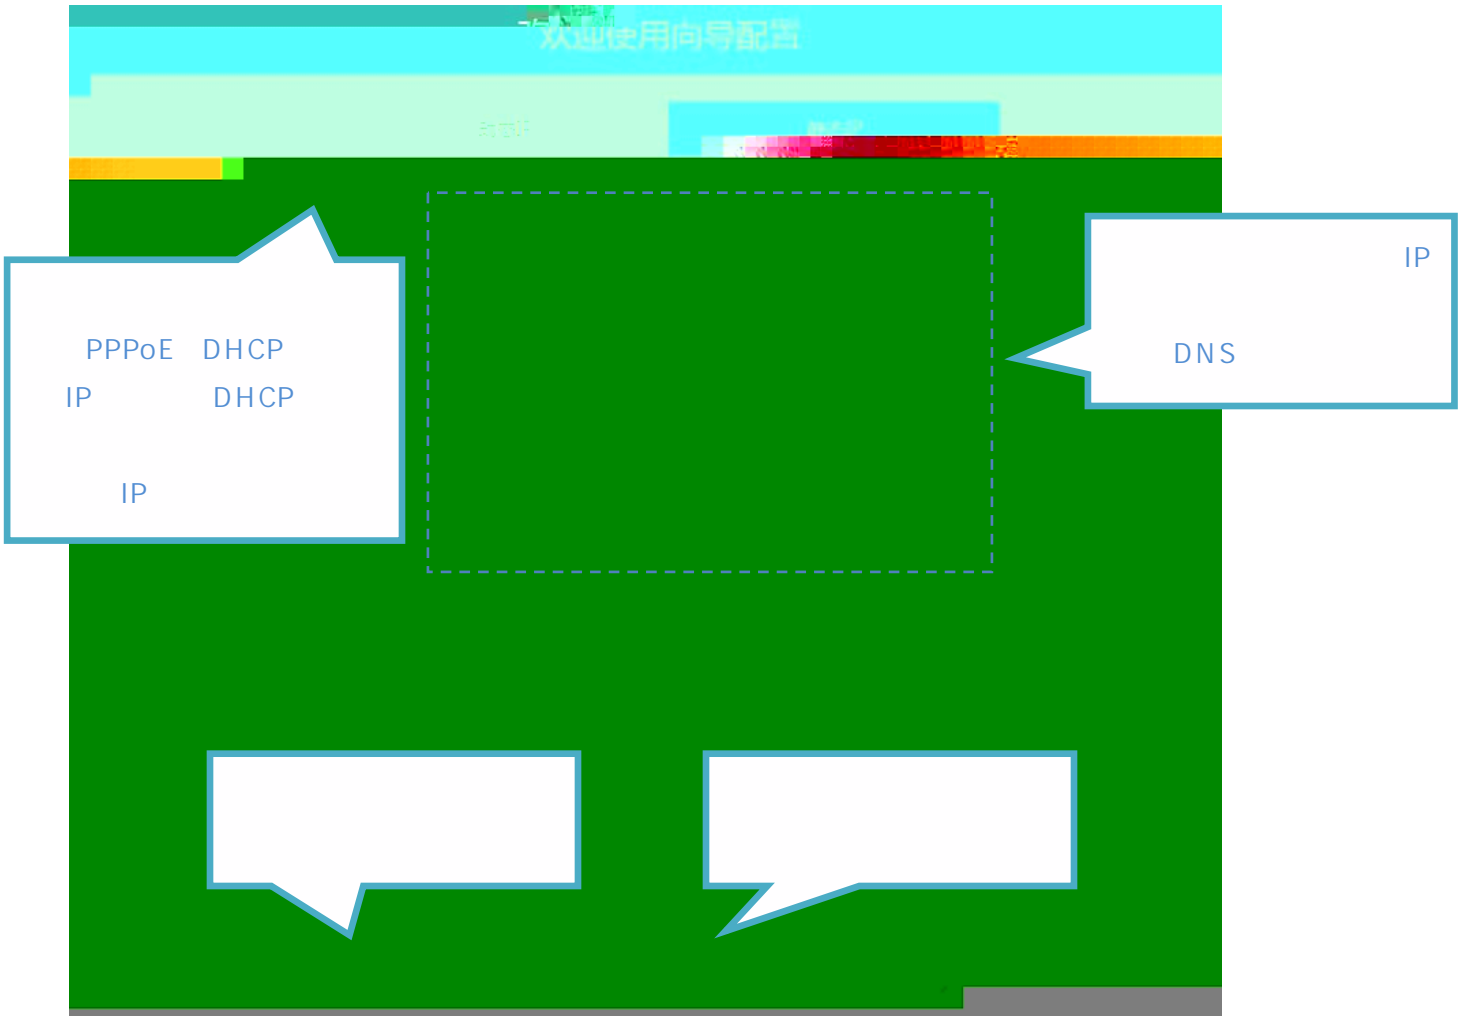

## 2.3 Web



APP




LAN

\* 联网类型 静态IP

\* IP地址 10.10.1.10

\* 子网掩码 255.255.255.0

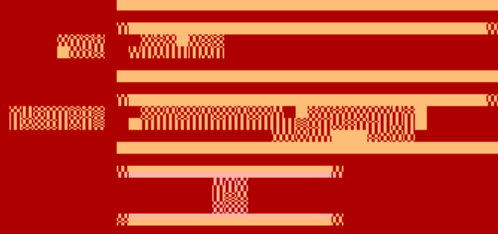

### 3 Eweb

#### 3.1

The screenshot displays the Eweb management interface. At the top, the '设备概况' (Device Overview) section shows: '内存使用率' (Memory Usage) at 47%, '桥接组总设备数' (Total Bridge Group Device Count) at 2, '系统运行: 03时21分48秒' (System Running: 03h 21m 48s), and '系统时间: 2021年10月12日 19:26:44' (System Time: 2021-10-12 19:26:44). Below this, the '设备名称: Ruijie' (Device Name: Ruijie) and 'MAC:' fields are visible. To the right, the '设备详细信息' (Device Detailed Information) section shows '设备型号: EST302' (Device Model: EST302) and '硬件版本: 1.00' (Hardware Version: 1.00). The '桥接组信息' (Bridge Group Information) section shows '桥接组名称: AP CPE' (Bridge Group Name: AP CPE) and '设备模式: CPE' (Device Mode: CPE). A table below lists device details with columns: '角色' (Role), 'MAC', 'IP', '序列号' (Serial Number), '设备名称' (Device Name), '关联时间' (Association Time), 'RSSI', '速率(Mbps)' (Rate), '频段' (Band), '信道' (Channel), and '状态' (Status). The table contains one entry with IP '10.10.10.' and association time '2021-10-12 16:'. At the bottom, the '端口信息' (Port Information) section shows 'LAN1' and 'LAN2' ports with their respective MAC addresses.


## 3.2

### 3.2.1 LAN

LAN

IP

IP

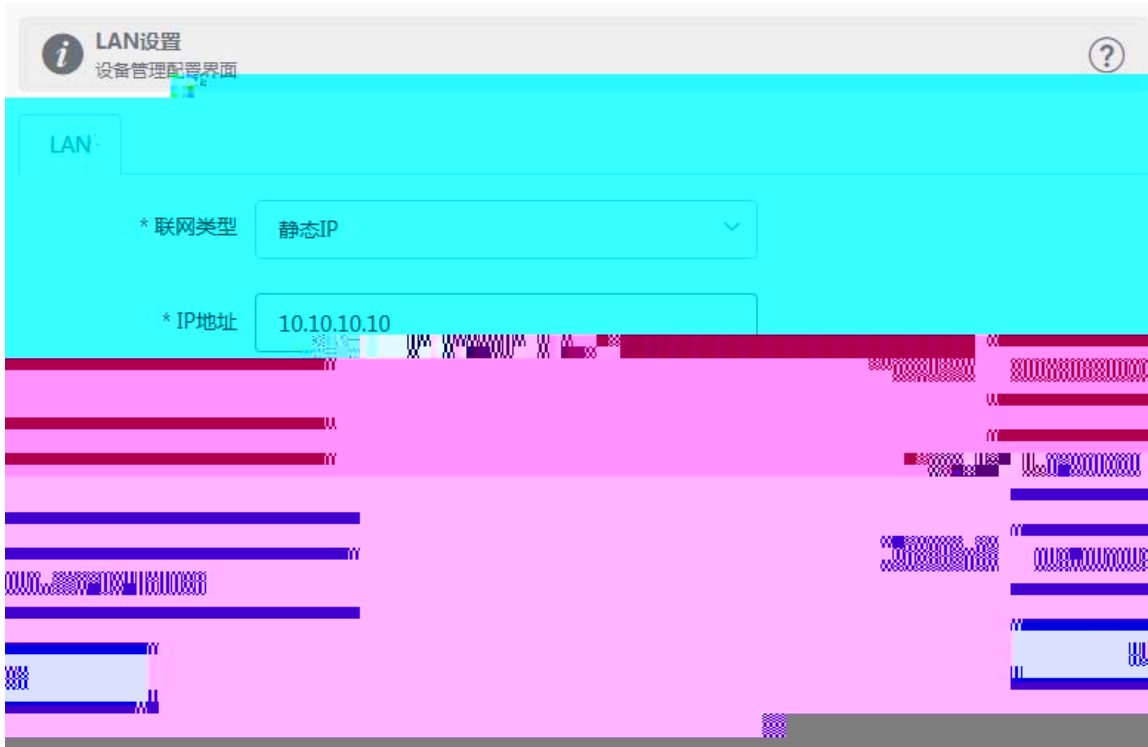


## 3.3 WiFi

### 3.3.1

#### 3.3.1.1 CPE



### 3.3.1.2 AP

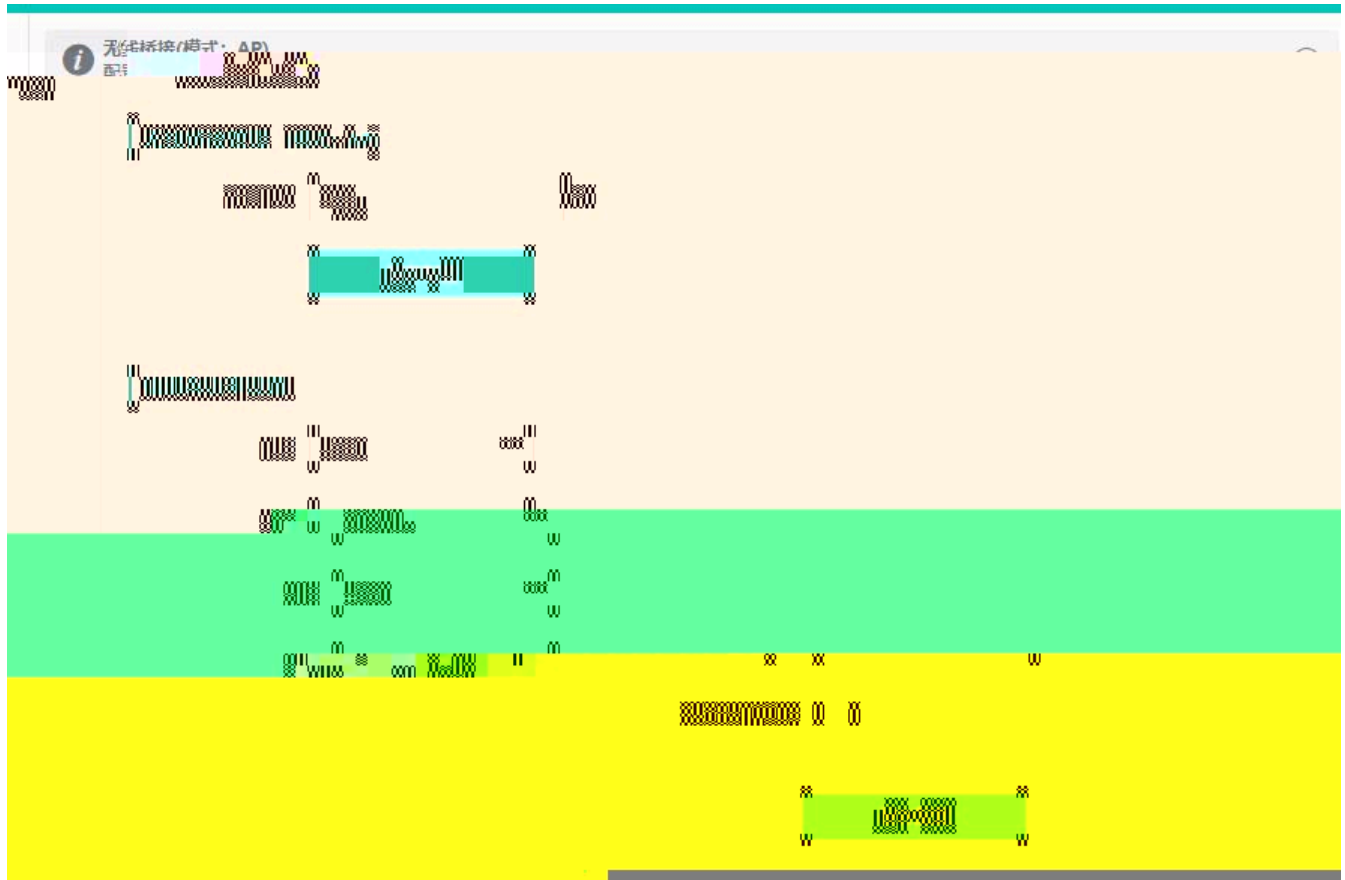

### 3.4


#### 3.4.1

ping traceroute nslookup


PI NG pi ng



traceroute

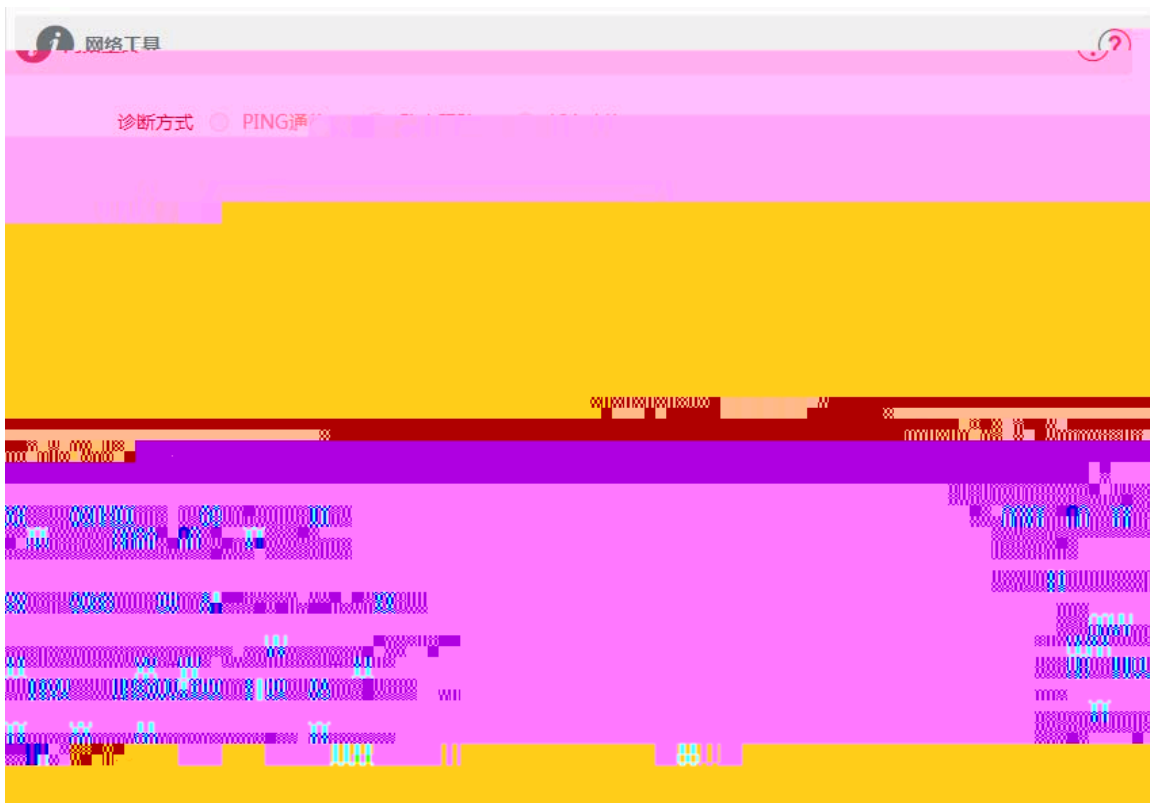

nslookup

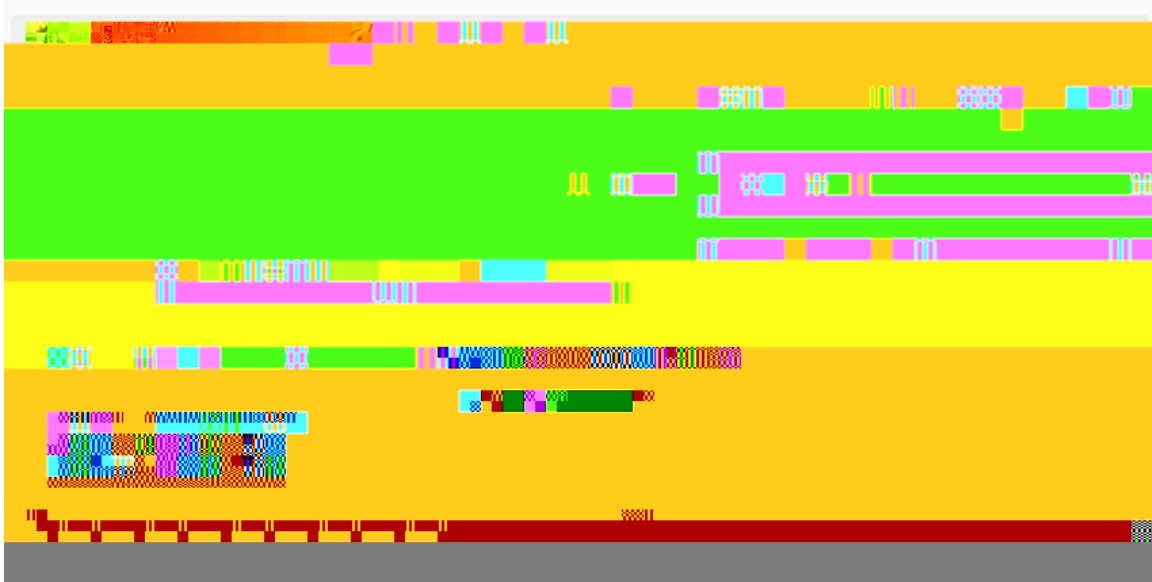

### 3.4.2




## 3.5

### 3.5.1




### 3.5.2

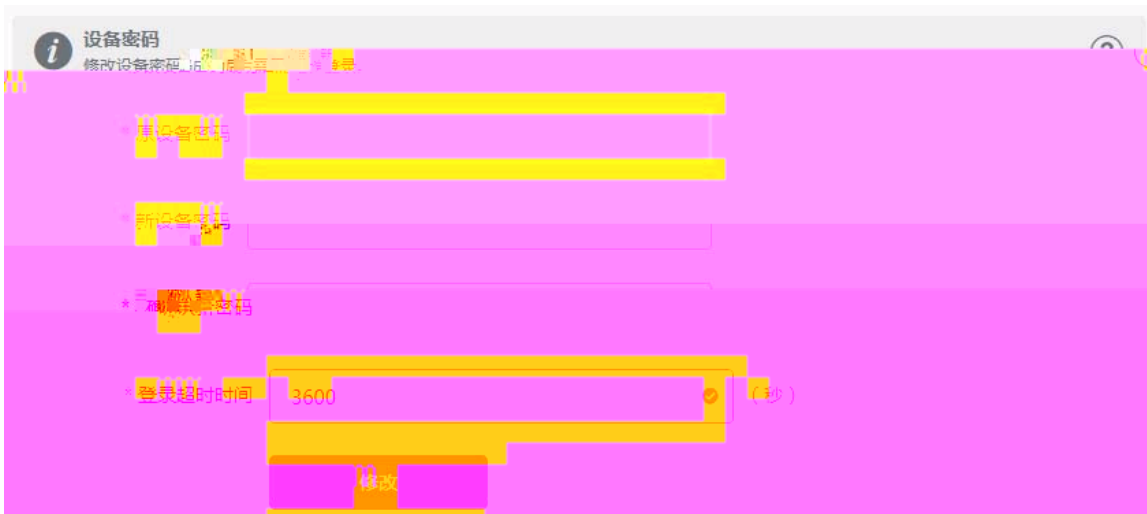


### 3.5.3

#### 3.5.3.1

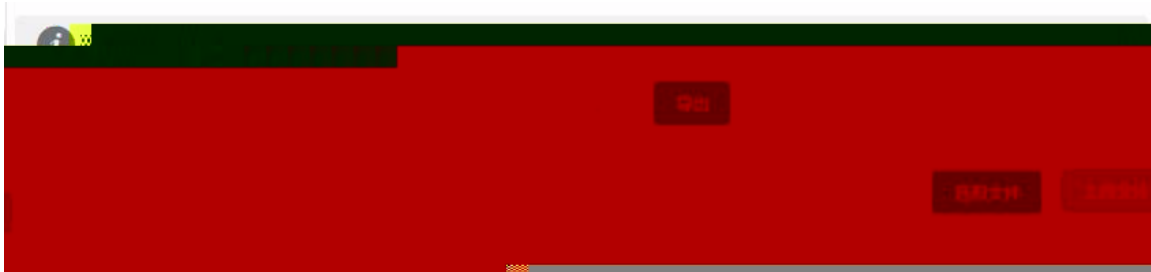

#### 3.5.3.2

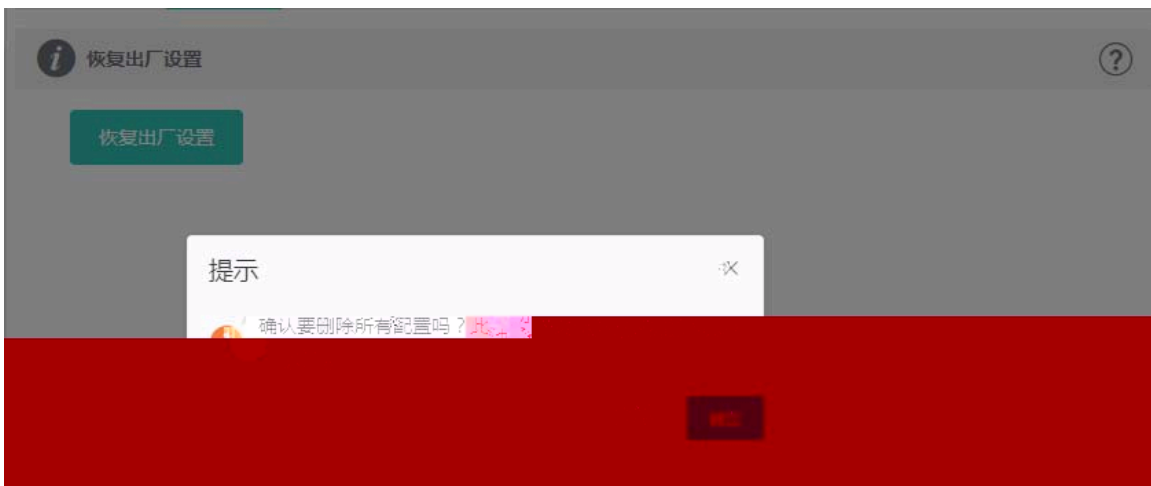

web

## 3.5.4

### 3.5.4.1

#### 本地升级

**i** 本地升级  
升级过程中请不要刷新页面或者关闭浏览器。

号 EST302 设备型

本 软硬件版

置  (如果版本差异太大, 建议不保留配置升级) 保留配

包 请选择安装包   (上传系统升级包) 安装

## 3.5.5

**i** 系统重启  
在系统重启过程中, 请不要将设备断电!

web

web

---

# 4

## 1 Web

1) LAN  
2) " IP " DHCP IP  
IP IP LAN IP , LAN IP  
10.10.10.10 255.255.255.0 IP 10.10.10.X X 2 254  
255.255.255.0

3) ping

4) ( admin)

## 2

Reset  
Reset 5 Reset  
http://10.10.10.10

## 3

32

8 A 255.0.0.0 16 B 255.255.0.0 24  
C 255.255.255.0 32 IP 255.255.255.255