

A



A

RG-AM5532-A RG-AM5528(ES)

A RG-AM5532-A RG-AM5528(ES)-A, RG-MAP852-A(V3)

A RG-AM5532-A RG-AM5528(ES)-A, RG-MAP852-A(V3)


A RG-AM5532-A RG-AM5528(ES)-A, RG-MAP852-A(V3)

A RG-AM5532-A RG-AM5528(ES)-A, RG-MAP852-A(V3)



- 1.
- 2.
- 3.
- 4.

A

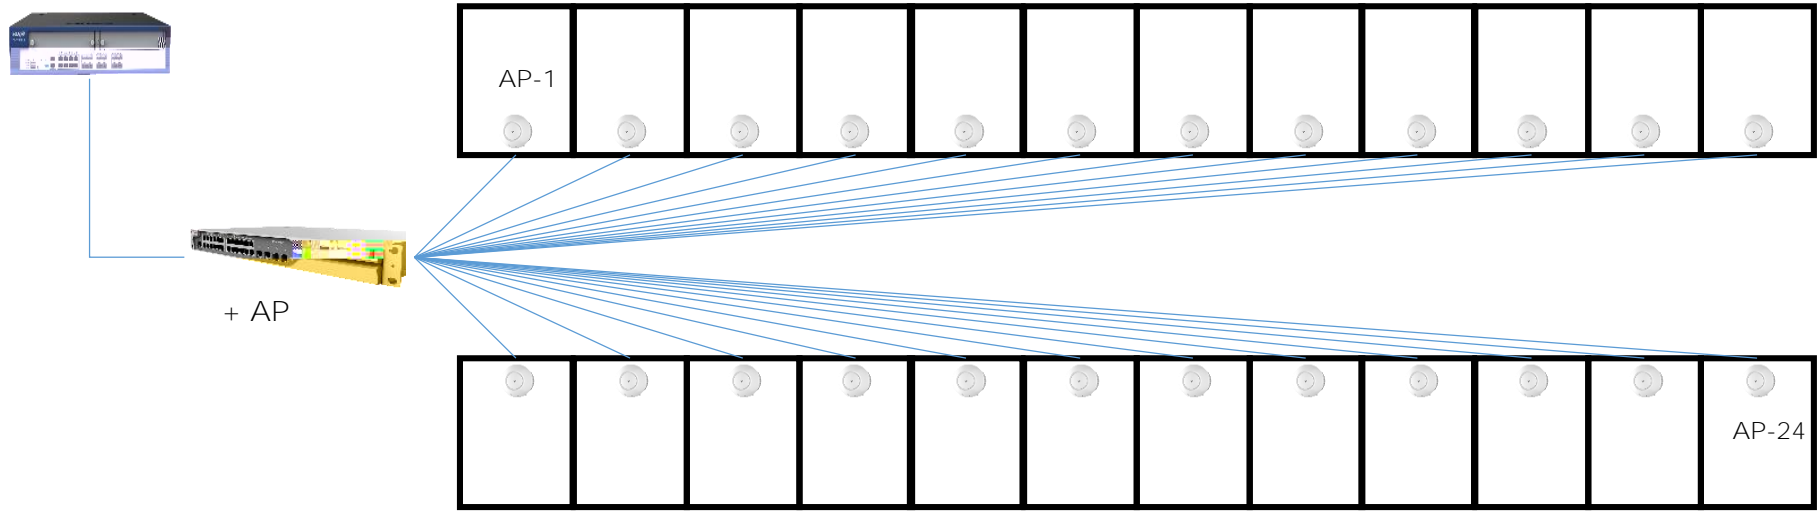

- AP 100 AP
- AP 24 AP AP 802.11ax
- AP AP
- AP AP 24V AP MCU POE POE

业务
管理

...

AP

AP

AP

AP

24

AP

• AP

AP
AP

AP

AP

AP

• AP

IP

AP

• AP

AP

AC

• AP

AP

AC

AC

• 11ax

• AP AP

• AP 20G

• AP

AP

AP

• AP

AP
AC

AP

- AP

AP


AP

- AP

AP

AP

- WLAN

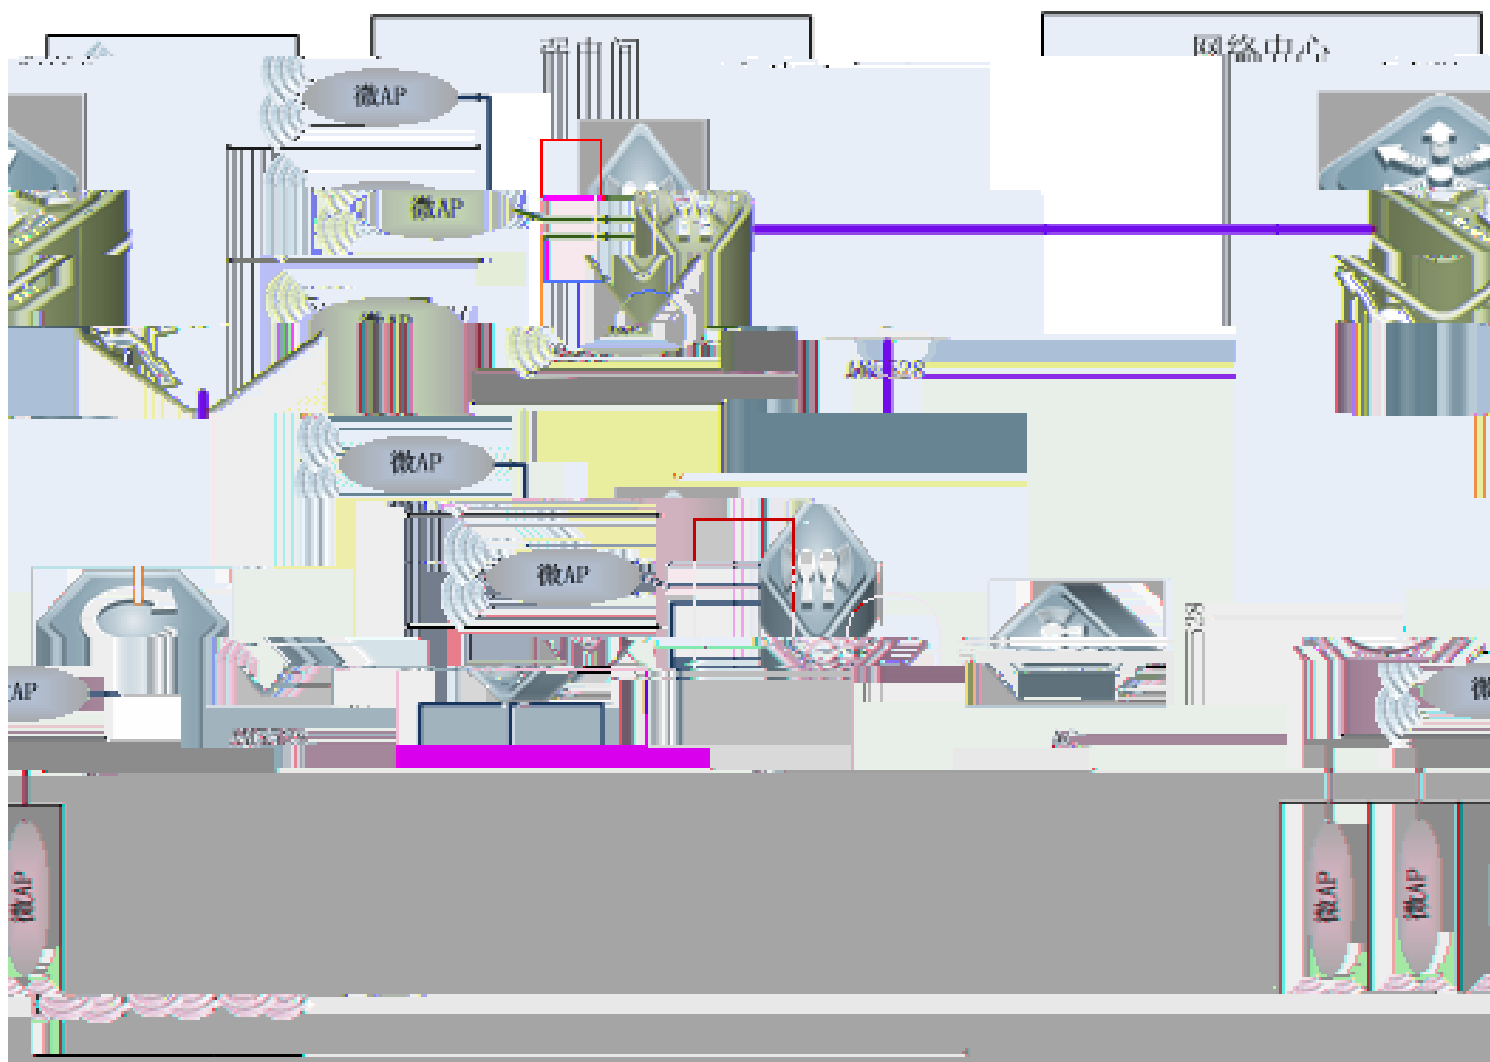



- 1.
- 2.
- 3.
- 4.

— RG-MAP852-A(V3)





RG-MAP852-A(V3) 2
1 Micro Usb Console
AM
AM

5

WAN AP

WAN







- 1.
- 2.
- 3.
- 4.

AP

1. LED

AP

show poe interfaces status

poE support force-enable

no poe

support force-enable

log

2. show interfaces status

up

AP

boot

10min

AP

AP

)

AP

3. show mac-address-table

AP

AP mac

Micro-USB

log

4. show ip dhcp binding

ping

AP

Micro-USB

log

5. show tftp-

AP

1. show run show ac-config active-file AP
2. AP show run tftp

```
ruijie#sh run | i tftp  
tftp-server enable  
tftp-server topdir flash:/decompress_appkg
```

3. AP AP

```
ruijie#cd decompress_appkg  
ruijie#dir  
Directory of flash:/decompress_appkg  
Number Properties Size Time Name  
-----  
1 -rwx 16.3M Wed Aug 3 21:31:31 2016 main_map552.bin //
```

4. AP IP

AP show ip dhcp binding show mac

IP

ping

5. show dvmg state AP

AP

+

UP

+AP

(25 26)

auto

auto

Ap AC

AP

SSID

AP AP

AP

+AP

RTR

+

AP

AP

show version all slot

AP

AP



- 1.
- 2.
- 3.
- 4.

				AP	
				AP	
				AP	Link Down
	3	1		FITAP	AP AC CAPWAP
	0.2	0.2		FITAP	MACCAP AP
	3	1			CAPWAP
	0.2	0.2		FITAP	AP AP

A

AM55xx

Fit

Fit

RG-MAP852-A(V3)

USB

MicroUSB

USB

PPT

THANKS

29

100036

Office Tel: 010-51715999

Fax: 010-51413399

4008-111-000

www.ruijie.com.cn



A 11

