





P-720

©2008





Arial

[] []

{ x|y|... }

[x|y|...]

//

1.



2.

3.

a

Enter a

" "

1+ 2
" Alt" " A"

Ctrl+Alt+A " Ctrl"

1 2

Alt F Alt

F

1	3
1.1	3
1.2	3
1.3	4
1.4	BSSID	4
1.5	4
1.6	4
1.7	4
2	6
2.1	Super AP	6
2.1.1	6
2.1.2	Multiple BSSID (32 BSSID)	6
2.1.3	AAA.....	6
2.1.4	6
2.1.5	7
2.2	Super Brige.....	7
3	8
3.1	FCC	8
3.2	IC	9
4	10
4.1	AP + Bridge	10
4.2	AP + AP	11
5	12
5.1	12
5.2	13
5.2.1	13
5.2.2	13
5.2.3	LEDs.....	14
5.2.4	RF	14
5.3	15

6.2.4	System.....	19
6.3	Status	20
6.3.1	Status Device Status.....	20
6.3.2	Status Wireless Status	21
6.3.3	Status Interface Statistics	22
6.4	Network	23
6.4.1	Network Interface	23
6.4.2	Network RADIUS Servers.....	25
6.4.3	Network DHCP Settings	26
6.4.4	Network NTP Settings	31
6.4.5	Network Time Settings.....	33
6.5	Wireless	34
6.5.1	Wireless Basic.....	34
6.5.2	Wireless Advance.....	44
6.5.3	Wireless WEP	51
6.5.4	Wireless MAC ACL.....	52
6.6	System	55
6.6.1	System Security	55
6.6.2	System SNMP.....	56
6.6.3	System Telnet.....	57
6.6.4	System Configuration	57
6.6.5	System Reset.....	59
6.6.6	System Upgrade.....	60
7	62
7.1	62
7.2	63
7.3	64
7.3.1	802.11g	64
7.3.2	11a	65



1

RG-P-720

5GHz

2.4GHz

802.11b/g

802.11a

802.11a/b/g

AP RG-P-720

Wi-Fi

802.11a/g + 802.11a/g

802.11

a+g

Multiple SSID

SSID

1.3

DCA

1.4 BSSID

32 BSSID BSSID BSSID
SSID RADIUS VLAN ID BSSID
802.1p tag 802.11e EDCA
QoS

1.5

IEEE 802.3af POE

1.6

HTTPs WEB SSHv2 CLI

DHCP Server/DHCP Relay/DHCP Client

HTTPs

1.7

HTTPs Web
CLI SSH



SNMP v1, v2, v3



MAC

Access Control

SSID

2.1.5

HTTPS, CLISH, SNMP


MIB

MIB


WEB

firmware

/



5.15 5.25GHz

		RG-P-780	2.4GHz
	1 11		

3.2 IC

Industry Canada

50

EIRP

5250-5350 MHz

4

RG-P-720 802.11a/b/g

AP + Bridge

AP + AP

4.1 AP + Bridge

AP + Bridge

11g AP + 11/7F12C5850B7071[(A83B5.349 Tf0 TcF33F5A2CAA4BC24E60TjTT1 1 Tf0



4.2 AP + AP

AP + AP
802.11a/b/g

5

5.1

RG-P-720

2	4		
1	5	1.8	
1			
1		100-240VAC, 50-60Hz	12VDC

RG-P-720

Adobe Acrobat Readers

Readme

5.2

5.2.1



RG-P-720

4

RG-P-720

Reset

RG-P-720

Reset	5
Reset	5

5.2.2

RG-P-720

RG-P-720

WLAN1	WLAN1
WLAN2	WLAN2
Power	
Reset	<p style="text-align: center;">Reset 5 AP Reset 5</p> <p style="text-align: center;">AP</p>
LAN	
Console	

5.3

P-720

PoE

802.3af

5.3.1 PoE

1.

4

RG-P-720


2.

RG-P-720

IEEE802.3af

PoE

RG-E-120

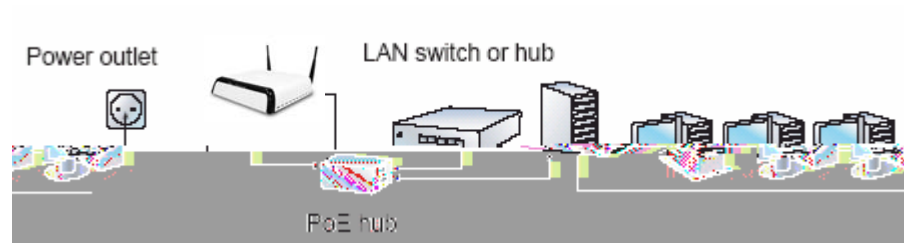

RG-E-120

RG-P-720

LAN

RG-E-120

PWR-LAN OUT

RG-E-120

LAN-IN

hub

6 Web

6.1 Web

Web RG-P-720

1. IP RG-P-720
P-720 IP

<https://192.168.2.2/a.rg>

RG-P-720 IP 192.168.2.2 subnet 255.255.255.0

2. RG-P-720 Web

admin admin01





3.

RG-P-720 Web



Web

Status –

Network –

Wireless – RG-P-720

System – RG-P-720

Exit – exit web web

6.2

6.2.1 Status

Device Status –

Wireless Status –

Interface Statistics –

6.2.2 Network

Interface – RG-P-720 LAN Bridge TCP/IP
RADIUS Server – 802.1x WPA RADIUS
DHCP Settings– DHCP server DHCP relay
NTP Settings – NTP
Time Settings –

6.2.3 Wireless

Basic –
Advance –Mutiple BSSID Bridge
WEP – WEP WEP
MAC ACL – RG-P-720 MAC ACL

6.2.4 System

6.3 Status

6.3.1 Status | Device Status

Device Status RG-P-720

System	
System Mode	AP
System Version	P-720.WHT.2.40.5053
Up Time	0 day(s) 00:13
System Time	1970/01/01/ 00:13
WLAN1 MAC	00:90:4b:90:ff:35
WLAN2 MAC	00:90:4b:90:ff:45
Free System Memory	27,284 K bytes
Total System Memory	63,252 K bytes

Network	
LAN Mode	static-IP
LAN IP	
WLAN ID	

System Version AP

firmware

Uptime – [day(s) hours:minutes]

System Time – RG-P-720

Wlan1 MAC / Wlan 2 MAC – RG-P-720 MAC

Free System Memory –

Total System Memory – RG-P-720

LAN Mode – RG-P-720 IP IP DHCP IP

LAN IP – RG-P-720 IP



Antenna Gain –				
2.4GHz	2dBi	RG-P-720	5GHz	2dBi
		0dBi		
Total Output Power (EIRP) –		RG-P-720	EIRP	

EIRP

6.4 Network

6.4.1 Network | Interface

Bridge

Network Interface Configuration

Bridge

Edite

6.4.2 Network | RADIUS Servers





RG-P-720 DHCP server

IP Address from / IP Address to – DHCP server IP
Netmask – IP IP
Gateway –
WINS Address (Windows Internet Naming Service) – WINS
 WINS IP []
Lease Time – IP [1-1000000]
Domain – DHCP server [1-128]
DNS address – DNS IP []
DNS secondary address – DNS IP []

Save

DHCP Settings	
Name	Value
Status	DHCP Server
IP Address from	192.168.123.2
IP Address to	192.168.123.254
Netmask	255.255.255.0
Gateway	192.168.123.1
WINS Address	0.0.0.0
lease time(seconds)	864000
Domain	
DNS Address	0.0.0.0
DNS Secondary Address	0.0.0.0
<input type="button" value="Edit"/>	
<input type="button" value="Apply Changes"/> <input type="button" value="Discard Changes"/>	
Note:	

DHCP server

DHCP server RG-P-720

Web RG-P-720 Apply Changes



DHCP Settings	
Name	Value
Status	DHCP Server
IP Address from	192.168.123.2
IP Address to	192.168.123.254
Netmask	255.255.255.0
Gateway	192.168.123.1
WTNS Address	0.0.0.0
lease time(seconds)	864000
Domain	
DNS Address	0.0.0.0
DNS Secondary Address	0.0.0.0
	Edit

Note:

[Reboot](#)

Server needs to be restarted. Please reboot.

DHCP Settings	
Name	Value
Status	DHCP Relay
Server IP	192.168.2.1
<input type="button" value="Save"/> <input type="button" value="Cancel"/>	
Note:	

Server IP – DHCP IP

DHCP Relay DHCP

Save

DHCP Settings	
Name	Value
Status	DHCP Relay
Server IP	192.168.2.1
<input type="button" value="Edit"/>	
<input type="button" value="Apply Changes"/> <input type="button" value="Discard Changes"/>	
Note:	

Web RG-P-720 Apply Changes

Reboot – RG-P-720

Reboot

Reboot

6.4.4 Network | NTP Settings

NTP Network Time protocol NTP NTP
Network| NTP Settings NTP

NTP Server		
Ntp Status:	enable	
Time Zone:	GMT+08:00	
Name	ServerIP	Action
Ntpserver-1	107.46.103.100	Delete Edit
Add		
Note:		

- NTP status – NTP
- Time Zone – NTP
- Delete – NTP
- Edit – NTP
- Add – NTP
- Add NTP

NTP Server		
Name	ServerIP	
	207.46.103.100	Ntpserver-1
Save Cancel		
Note:		

Save



Reboot –

RG-P-720

Reboot**Reboot**

6.4.5 Network | Time Settings

Network | Time Settings

Date Configuration	
Date	2005/07/19
Time	13:51
<input type="button" value="Edit"/> <input type="button" value="refresh"/>	
Note:	

Edit

Date Configuration	
Date	2005 / 07 / 19
Time	13 : 58
<input type="button" value="Apply"/> <input type="button" value="Cancel"/>	
Note:	

Apply

6.5 Wireless

6.5.1 Wireless | Basic

wireless | Basic

RG-P-720

regulatory domain

Layer 2 Isolation

Basic Wireless Setting	
Radio :	wlan1
Name	Value
Domain	WORLD
Static Channel	11
Band	2.4GHz(Mixed 11g)
Total Output Power (EIRP)	14dBm
Antenna Gain	2dBi
RTS Threshold	2347 bytes
Layer2 Isolation	disabled
Mode	AP
Action	Edit Site Survey

Note:

Edit –

Site Survey –

DCA

Basic Wireless Setting	
Radio :	wlan1
Name	Value
Domain	WORLD
Auto Channel	11
Band	2.4GHz(Mixed 11g)
Total Output Power (EIRP)	14dBm
Antenna Gain	2.3dBi
Threshold	2347 bytes
Threshold	10 mins
Optional channel	1,6,11 channel
Layer 2 Isolation	disabled
Mode	AP

[Edit](#)
[Site Survey](#)
[Action](#)

Radio – RG-P-720

Domain – Regulatory Domain

Static Channel / Auto Channel – AP

DCA Dynamic Channel Allocation

Auto Channel

Static Channel

DCA Dynamic Channel Allocation

AP

Band –



2.4GHz 11g only

Basic Wireless Setting

Radio : wlan1

Name	Value
Domain	WORLD
Channel	11

Band
Total Output Power (EIRP)
Antenna Gain
RTS Threshold
Layer2 Isolation
Mode
Action

Microsoft Internet Explorer
When site survey, all connecting wireless clients will be kicked off
Do it anyway?
确定 取消

Edit Site Survey

Note:

site survey

Radio: wlan1

Basic Wireless Setting

Rescan –

Return – Basic Wireless Setting

	Site Survey	RG-P-720	RG-P-720
	Site Survey	AP	

Basic Wireless Setting	
Name	Value
Radio Name	wlan1
Domain	WORLD
Channel	1
Band	2.4GHz (Mixed 11g)
Total Output Power (EIRP)	14 dBm
Antenna	FRE Dual Band
<input type="text" value=""/> bytes [0..2347]	RTS Threshold <input type="text" value="2347"/>
<input type="text" value=""/> mins <input type="checkbox"/> Enable DCA	DCA Threshold <input type="text" value="10"/>
<input type="checkbox"/> 3 <input type="checkbox"/> 4 <input type="checkbox"/> 5 <input type="checkbox"/> 6 <input type="checkbox"/> 7 <input type="checkbox"/> 8 <input type="checkbox"/> 9 <input type="checkbox"/> 10 <input type="checkbox"/> 11 <input type="checkbox"/> all	DCA optional channel <input type="checkbox"/> 1 <input type="checkbox"/> 2
	Layer2 Isolation <input type="text" value="disabled"/>
	Mode <input type="text" value="AP"/>
<input type="button" value="Cancel"/>	<input type="button" value="Save"/>
Note:	

DCA

Basic Wireless Setting	
Name	Value
Radio Name	wlan1
Domain	WORLD
Channel	1
Band	2.4GHz (Mixed 11g)
Total Output Power (EIRP)	14 dBm
Antenna	FRE Dual Band
RTS Threshold	2347
Enable DCA	<input checked="" type="checkbox"/>
DCA Threshold	10
DCA optional channel	<input checked="" type="checkbox"/> 1 <input type="checkbox"/> 2 <input type="checkbox"/> 3 <input type="checkbox"/> 4 <input type="checkbox"/> 5
Layer2 Isolation	disabled
Mode	AP

Note:

Radio Name RG-P-720

Domain regulatory domain

2.4 GHz 5 GHz



Channels RG-P-720

Regulatory Domain

RG-P-720

AP

AP
2.4GHz
36 46 64

4
1 6 11

5.8GHz

AP

Band

6

5GHz 11a

5GHz Turbo Mode 11a 2.4GHz Mixed 11g
Mixed 11g WiFi 2.4GHz 11g only WiFi

2.4GHz 11g only

2.4GHz



Basic Wireless Settings	
Radio :	wlan1
Name	Value
Domain	WORLD
Static Channel	1
Band	2.4GHz(Mixed 11g)
Total Output Power (EIRP)	14dBm
Antenna Gain	2dBi
RTS Threshold	2347 bytes
Layer2 Isolation	disabled
Mode	AP
Action	Edit Site Survey
Apply Changes Discard Changes	
Note:	

DCA

Basic Wireless Setting	
Radio :	wlan1
Name	Value
Domain	WORLD
Auto Channel	auto
Band	2.4GHz(Mixed 11g)
Total Output Power (EIRP)	14dBm
Antenna Gain	2dBi
RTS Threshold	2347 bytes
DCA Threshold	10 mins
DCA optional channel	1,6,11 channel
Layer2 Isolation	disabled
Mode	AP
Action	Edit Site Survey
Apply Changes Discard Changes	
Note:	

Discard Changes –

DCA

DCA

Basic Wireless Setting	
Radio :	wlan1
Name	Value
Domain	WORLD
Auto Channel	11
Band	2.4GHz(Mixed 11g)
Total Output Power (EIRP)	14dBm
Antenna Gain	2dBi
RTS Threshold	2347 bytes
DCA Threshold	10 mins
DCA optional channel	1,6,11 channel
Layer2 Isolation	disabled
Mode	AP
Action	<input type="button" value="Edit"/> <input type="button" value="Site Survey"/>
Note:	
<input type="button" value="Reboot"/>	
Server needs to be restarted. Please reboot.	

Edit

Edit

Reboot

Reboot

Edit

Save

Reboot



6.5.2 Wireless | Advance

RG-P-720 Multiple BSSID MBSSID 16 BSSID
BSSID RG-P-720
AP VLAN ID BSSID
AP **Wireless | Advance**
Multiple BSSID SSID SSID VLAN
SSID

BSSID SSID Multiple BSSID Multiple ESSID

Edit – MBSSID
Delete – MBSSID AP MBSSID

Detail MBSSID

<input checked="" type="checkbox"/> Advance Wireless Setting	
Radio:	wlan1
Interface:	wlan1_0
Mode:	AP
SSID:	P-780
Hidden SSID:	Disabled
Use VLAN:	Disabled
VLAN ID:	1
802.1p Tag	
SSID priority	Disabled
Security:	Disabled
<input type="button" value="Refresh"/> <input type="button" value="Return"/>	
Note:	

Radio – radio WLAN1 WLAN2

Interface –

Mode –

SSID – SSID

Hidden SSID – Hidden SSID

Use VLAN – VLAN

VLAN ID – VLAN VLAN ID

802.1p Tag – 802.1p tag tag

SSID priority – BSSID 0

Accounting –

Security –

Current Connect Number –

Detail – MAC

Refresh

Return – Advance Wireless Setting

Detail



Current Connected Clients MAC List						
index	Client MAC	IP Addr	Auth Type	Signal/Noise	Input Packets #	Output Packets #
1	00:0f:3d:e1:15:16	192.168.2.100	NONE	22	92	7

Note:

Client MAC – MAC
 IP Addr – IP
 Auth Type – PEAP TLS
 TTLS PSK
 Signal/Noise – SNR
 Input Packets –
 Output Packets –

AP New Edit MBSSID

Advance Wireless Setting

Radio: wlan1

Interface: wlan1_0

Mode: AP

SSID: P-720g

Hidden SSID: MBSSID Mode SSID

VLAN and QoS

priority(Disable VLAN) SSID

priority: 0 (0~7)

VLAN

VLAN ID: (1~4094)

802.1p Tag (0~7)

Accounting

Accounting Server Profile: [dropdown]

Accounting Interim Interval: [input]

Minutes

Radio – [wlan1/wlan2]
 Mode – RG-P-720 [AP/Bridge]
 Interface –
 SSID – 32
 SSID P-720g AP SSID
 AP SSID



MBSSID	BSSID	SSID	BSSID	SSID
SSID	-	-		

Hidden SSID –

SSID	SSID	Beacon [enabled/disabled]	disabled	SSID AP
------	------	------------------------------	----------	------------

VLAN and QoS –	VLAN	QoS	BSSID
802.11e EDCA	802.1p		

SSID priority (Disable VLAN) –	QoS	(B)SSID BSSID	802.11e EDCA BSSID
---------------------------------------	-----	------------------	-----------------------

8	1, 2, 0, 3, 4, 5, 6, 7	AP
---	------------------------	----

QoS	0	0
-----	---	---

Enable VLAN –	VLAN	SSID	VLAN ID
802.1p tag			

VLAN ID –	VLAN ID	1	4094
------------------	---------	---	------

802.1p Tag –	802.1p Tag	QoS
0	7	

802.1p tag	8	1, 2, 0, 3, 4, 5, 6, 7
------------	---	------------------------

Accounting –

Enable Accounting –

RADIUS	RADIUS
802.1x	WPA WPA2 WPA2 MIXED MAC auth

Security:		<input type="radio"/> WEP(Wired Equivalent Privacy)		WEP KeyIndex: <input type="text" value="1"/>	
<input type="radio"/> 802.1x		RADIUS Server Profile: <input type="text" value=""/>		RADIUS Server is NULL. Click here to add profile	
<input type="radio"/> WPA		Dynamic Key Length: <input checked="" type="radio"/> 64 bits <input type="radio"/> 128 bits		RADIUS Server Profile: <input type="text" value=""/>	
Interval: <input type="text" value=""/> Minutes		<input type="radio"/> WPA2		Algorithm: <input type="text" value=""/>	
Profile: <input type="text" value=""/>		RADIUS Server Profile: <input type="text" value=""/>		Group Key Rekey Interval: <input type="text" value=""/>	
Interval: <input type="text" value=""/> Minutes		<input type="radio"/> WPA2 MIXED		Algorithm: <input type="text" value=""/>	
Profile: <input type="text" value=""/>		RADIUS Server Profile: <input type="text" value=""/>		Group Key Rekey Interval: <input type="text" value=""/>	

Security –

WEP – WEP

WEP WEP Key Index /C2_2 1 Tf 0 Tc 0 Tw 3.5Tm 91



WPA2 MIXED –

WPA2

WPA

RADIUS Server Profile –

RADIUS

Network | RADIUS Servers

Algorithm –

WPA

WPA2

[TKIP/AES]

Group Key Rekey interval –

10

<input type="radio"/> WPA-PSK		
	Use Pre-Shared Key:	<input type="text"/>
	Algorithm:	TKIP <input type="button" value="v"/>
	Group Key Rekey Interval:	<input type="text"/> Minutes
<input type="radio"/> WPA2-PSK		
	Use Pre-Shared Key:	<input type="text"/>
	Algorithm:	TKIP <input type="button" value="v"/>
	Group Key Rekey Interval:	<input type="text"/> Minutes
<input type="radio"/> WPA2-PSK MIXED		
	Use Pre-Shared Key:	<input type="text"/>
	Algorithm:	TKIP/AES
	Group Key Rekey Interval:	<input type="text"/> Minutes
		<input type="radio"/> MAC Auth
<input type="button" value="v"/>		RADIUS Server Profile:
<small>RADIUS Server Profile: Click here to add profile...</small>		
		<input type="radio"/> Disabled

WPA-PSK –

RADIUS

WPA PMK

WPA2-PSK –

RADIUS
WPA2 PSK

WPA2 PMK
AP WPA PSK

WPA2



Disabled –

BSSID

Advance Wireless Setting			
Radio:	wlan2		
Interface:	bridge2_0		
Mode:	Bridge		
Remote MAC:	<input type="text" value="00:00:00:00:00:00"/>		
Security:	<input type="radio"/> WEP(Wired Equivalent Privacy)		
		WEP KeyIndex:	<input type="text" value="1"/>
	<input type="radio"/> WPA-PSK		
		Algorithm:	<input type="text" value="TKIP"/>
		Rekey Interval:	<input type="text" value=""/>
	<input checked="" type="radio"/> Disabled		
	<input type="button" value="Save"/>	<input type="button" value="Cancel"/>	
			Note:

- Remote MAC – Bridge link MAC
- Security – WEP WPA-PSK(TKIP AES)
- Use Pre-Shared Key – 8-64 WPA
- Algorithm – TKIP, AES
- Rekey Interval –

WEP key WPA-PSK
 WEP aaaaa Wireless | WEP

6.5.3 Wireless | WEP

Wireless | WEP WEP

WEP WEP
 Wireless | Advance

Radio Setting

Radio:

WEP Configuration

Index	Key	Action
Key 1	*****	<input type="button" value="Edit"/>
Key 2	*****	<input type="button" value="Edit"/>
Key 3	*****	<input type="button" value="Edit"/>
Key 4	*****	<input type="button" value="Edit"/>

The network password needs to be 64bits or 128bits depending on your network configuration. This can be entered as 5 or 13 ascii characters or 10 or 26 hexadecimal characters.

Note:

Radio – [wlan1/wlan2]
Edit – WEP

WEP aaaaa

Radio:

Action	Index	Key
<input type="button" value="Save"/> <input type="button" value="Cancel"/>	Key 1	<input type="text"/>
<input type="button" value="Edit"/>	Key 2	*****
<input type="button" value="Edit"/>	Key 3	*****
<input type="button" value="Edit"/>	Key 4	*****

s depending on your network configuration. This can be entered as 5 or 13 ascii characters or 10 or 26 hexadecimal characters.

The network password needs to be 64bits or 128bit characters or 10 or 26 hexadecimal characters.

Note:

6.5.4 Wireless | MAC ACL



MAC ACL RG-P-720
 Wireless | MAC ACL

Radio Setting	
Radio:	wlan1
Policy Setting	
Policy	disabled
MAC ACL Configuration	
MAC List	Action
Add	
Note:	



MAC Address – MAC [00:AA:A2:5C:89:56]

Save – MAC

Radio Setting	
Radio:	wlan1
Policy Setting	
Policy	deny Edit
MAC ACL Configuration	
MAC List	Action
9	Delete 00:90:4B:00:02:1
Add	
Apply Changes Discard Changes	

Apply Changes –

Apply Changes

Discard Changes –

Apply Change

Radio Setting	
Radio:	wlan1
Policy Setting	
Policy	deny Edit
MAC ACL Configuration	
MAC List	Action
00:90:4B:00:02:19	Delete
Add	
Note:	
Reboot	
Server needs to be restarted. Please reboot.	

Reboot – Reboot

Reboot

Reboot

6.6 System

6.6.1 System | Security

System | Security

User Name – RG-P-720 Web CLI [1-32]

Old Password –

New Password – [4-8]

Confirm Password –

Save – Save

4-8

admin

admin01

Save

6.6.2 System | SNMP

SNMP
SNMP

Internet

SNMP

System | SNMP

SNMP

General Configuration		
Name	Value	Action
Readonly community	public	<input type="button" value="Edit"/>
Readwrite community	private	<input type="button" value="Edit"/>
DefaultTrap community	public	<input type="button" value="Edit"/>

Trap Configuration		
Trap Group	Host	Host Port

Note: SNMP Configuration

General Configuration –

SN4C8045CCC45EE05B50EE(Internet)TjC21_1 Tf003F13 Td412MIB01C4FjTT1 1 Tf()T10821

Trap Configuration					
Index	Host Ip	Host Port	Trap Type	Community	Action
	<input type="text"/>	<input type="text"/>	trapsink	<input type="text"/>	<input type="button" value="Save"/> <input type="button" value="Cancel"/>
Note: SNMP Configuration			<input type="text" value="trapsink"/> <input type="text" value="trap2sink"/> <input type="text" value="informsink"/>		

Host IP – SNMP IP [192.168.2.100]
Host Port – trap []
Trap Type – trap [v1/v2/inform]
Community – SNMP trap table [1-32 ASCII] trap SNMP SNMP
Save –
Cancel –

6.6.3 System | Telnet

System | Telnet RG-P-720 telnet/SSH

Telnet		
Name	Status	Action
Telnet Service	Enabled	<input type="button" value="Edit"/>
SSH Service	Enabled	<input type="button" value="Edit"/>

Note:

Telnet Service – RG-P-720 telnet
SSH Service – RG-P-720 SSH
Enabled telnet/CLISH RG-P-720
 IETF SSH SSHv2

6.6.4 System | Configuration

System | Configuration

Backup –
Upload/Restore –

System Configuration

Configuration Backup	
Description Message	Action
P-720.GSI. 2. 13. 1228	<input type="button" value="Preparation"/>

Configuration Upload	
Description Message	Action
Configuration file to upload	<input type="text"/> <input type="button" value="Browse..."/>
	<input type="button" value="Upload"/> <input type="button" value="Cancel"/>

Note: System Configuration

Preparation

PC

Description Message	Action
P-720.GSI. 2. 13. 1228	<input type="button" value="Preparation"/>

.cfg

Description Message –

Preparation –

Message	Action	Description
Could not store Configuration backup file in safe place. Configuration file name should only include English characters or numbers.	<input type="button" value="Download"/>	Download and Warning: Cor

em Configuration Note: Syst



RG-P-720

Browse

RG-P-720



Configuration Upload	
Description Message	Action
Configuration file to upload	<input type="text"/> <input type="button" value="Browse..."/>
<input type="button" value="Upload"/> <input type="button" value="Cancel"/>	
Note: System Configuration Upload.	

Upload

Reboot –

Reset –

Reboot

System Reset	
Description	Action
Are you sure you want to REBOOT the device? It will take some time to boot up.	<input type="button" value="Reboot"/> <input type="button" value="Cancel"/>
Note: System Reboot. System Reset.	

Reset

System Reset	
Description	Action
Are you sure you want to RESET the device? It will take some time to boot up.	<input type="button" value="Reset"/> <input type="button" value="Cancel"/>
System Reset.	Note: System Reboot



6.6.6 System | Upgrade

Firmware Upgrade	
Description	Action
Current software version: P-720.GSI.2.13.1228	
Upgrade the firmware	<input type="button" value="Upload"/>
Note: Firmware Upgrade	

Upload –

firmware

Upload

firmware image

Upload



Firmware Upgrade	
Description	Action
<input type="text" value="Browse..."/>	Firmware image
<input type="button" value="Upload"/> <input type="button" value="Cancel"/>	<input type="button" value="Upload"/>

Note: Firmware Upgrade



POE	48V IEEE802.3af-2003
	: 100-240 VAC, 50-60Hz : 12VDC
4	Power LAN WLAN1 WLAN2
RG-P-720	
	RG-P-720
4	1.8m

7.2

	admin
	admin01
SNMP Community	Public
SNMP Community	Private

IP



	11g
Regulatory Domain	World
SSID	P-720g
	11
RTS	2347 bytes
EIRP	14dBm
	Open System
MAC ACL	Disable

44	5220				—
46	5230	—	—	—	
48	5240				—
		15 dBm	17 dBm	15 dBm	15 dBm
U-NII middle band (5250 – 5350 MHz)					
52	5260				—
56	5280				—
60	5300				—
64	5320				—
		17 dBm	17 dBm	17 dBm	—
U-NII upper band (5725 – 5875 MHz)					
149	5745		—	—	—
153	5765		—	—	—
157	5785		—	—	—
161	5805		—	—	—
165	5825	—	—	—	—
		17 dBm	17 dBm	17 dBm	—