



**RG-SAM**

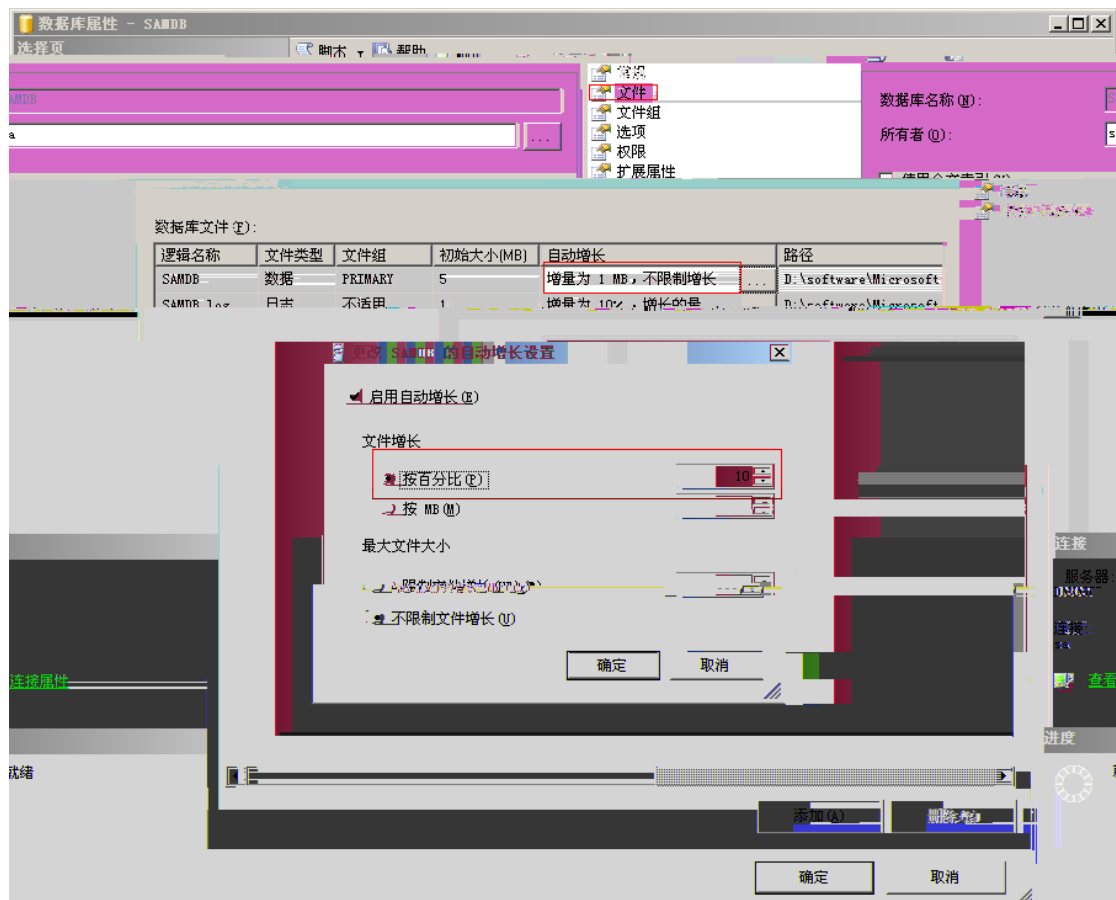


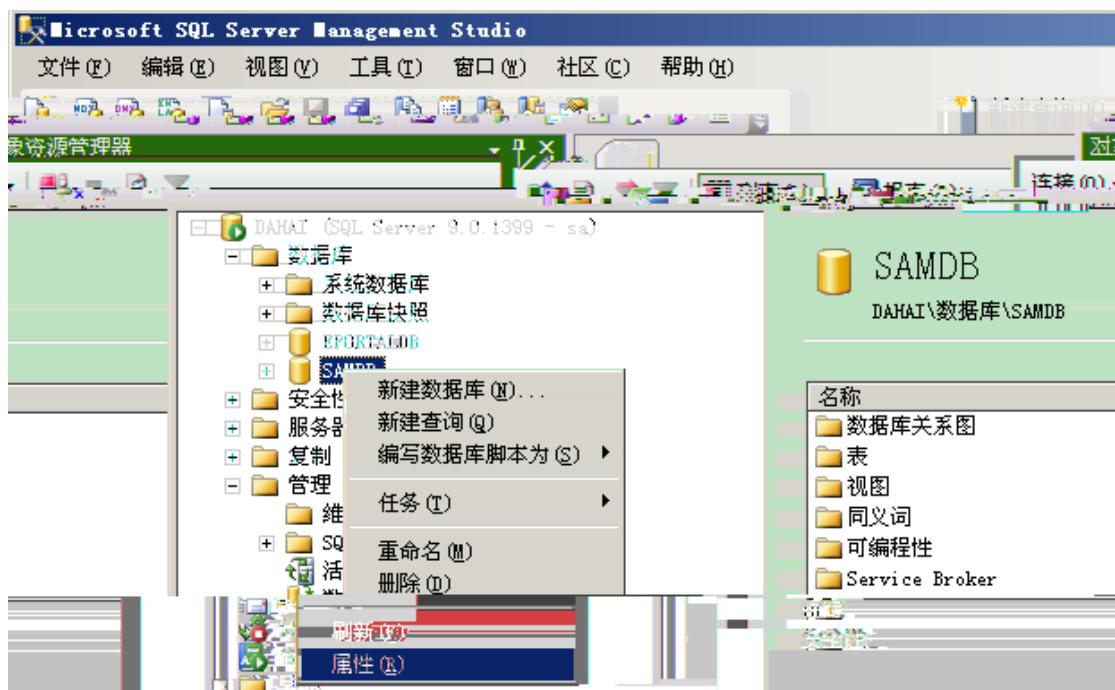


4.

“ ”

.






6.

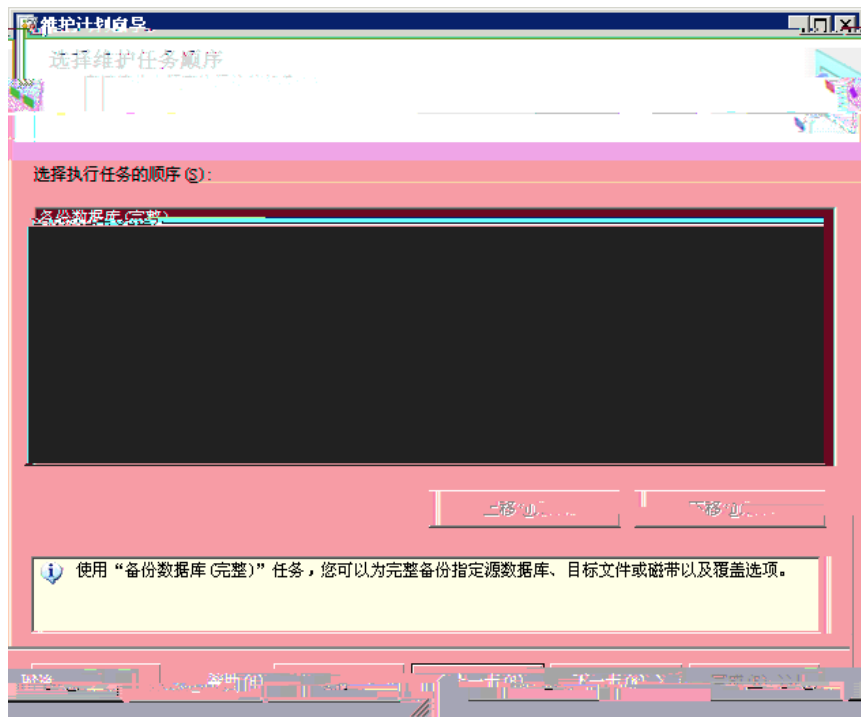

7.

“ ”

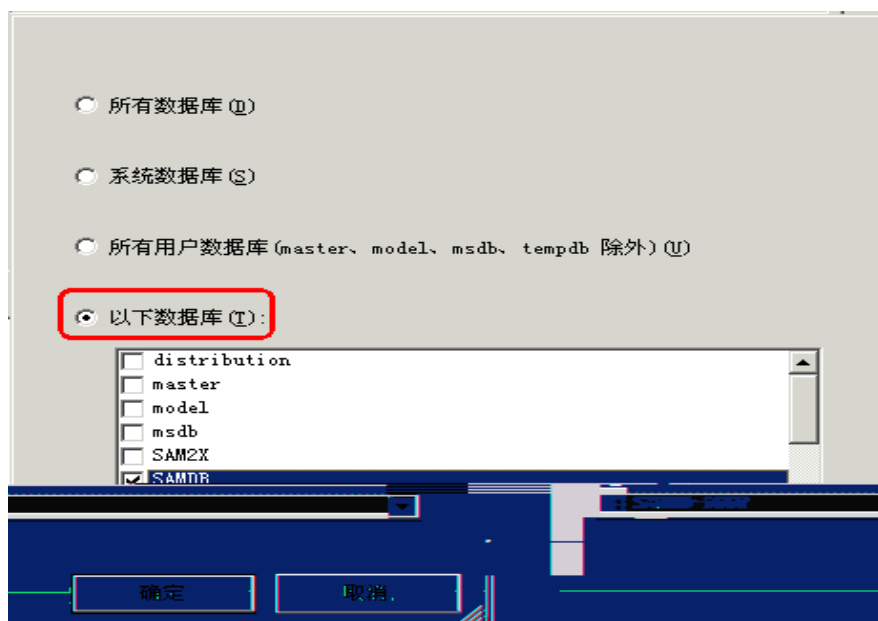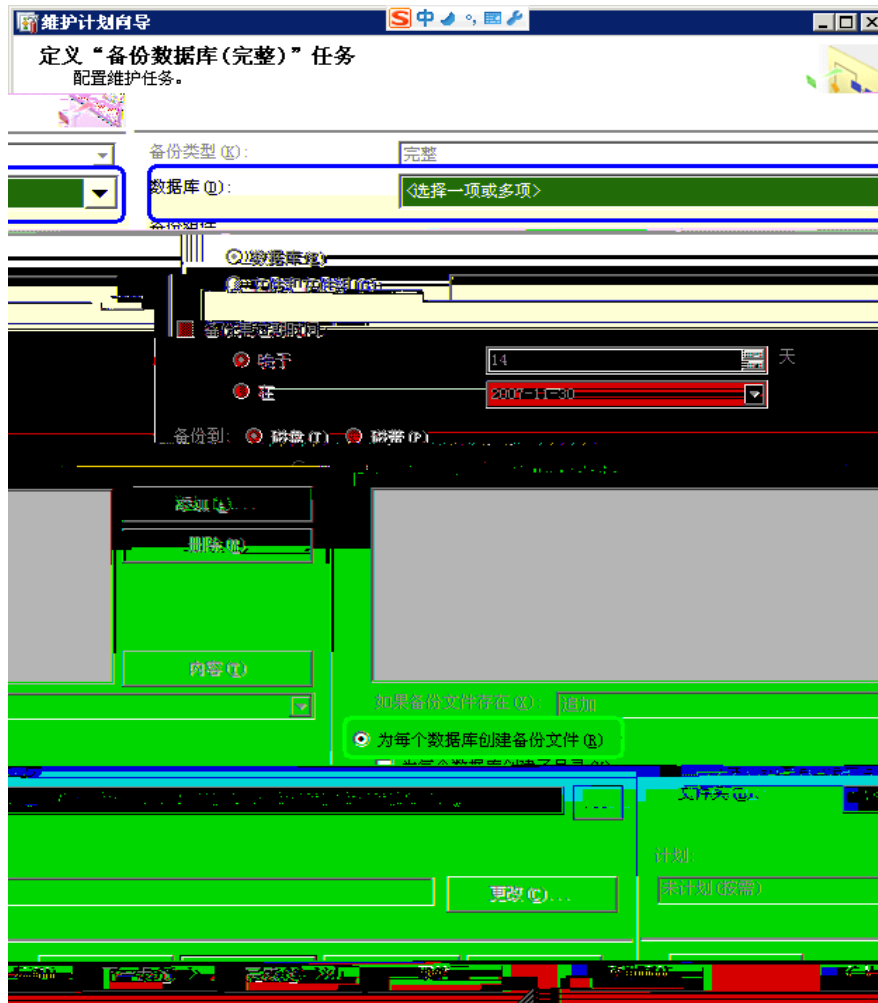

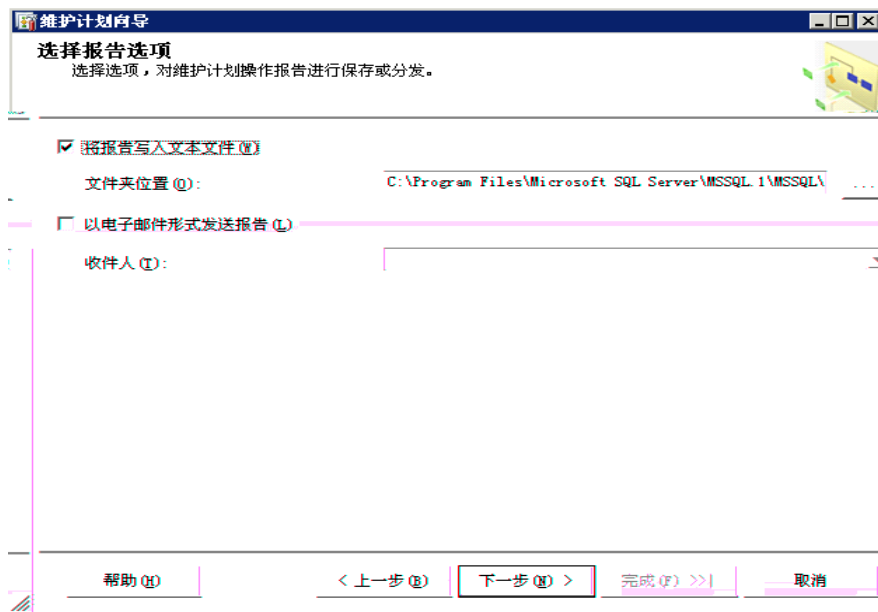


9. “ ”



10. “ - ”



11.

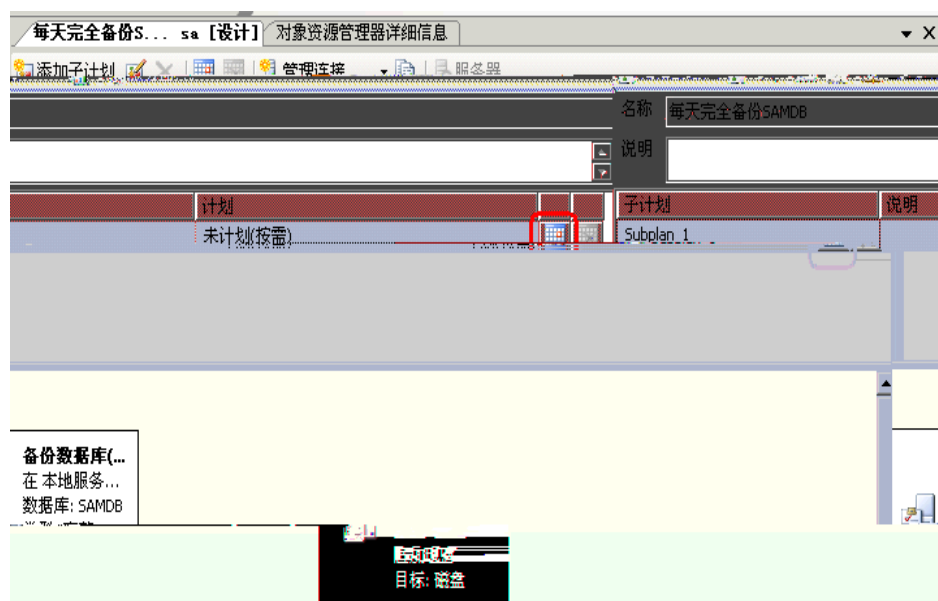

SQL SERVER Agent

2

2


1. SQL Server Management Studio

“ ”

2. “ ” “ ”



3.

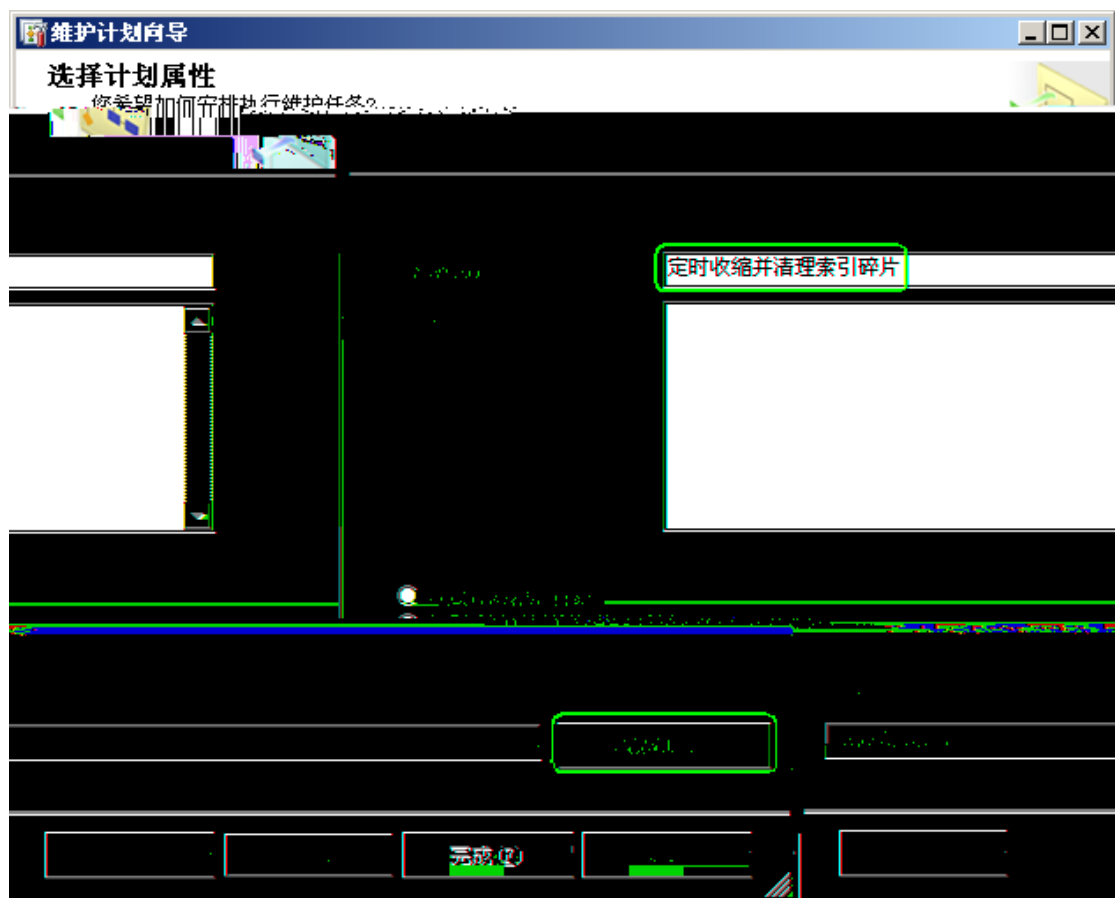

作业计划属性 - 每周定期收缩SAMD8

名称 (N): 每周定期收缩SAMD8 计划中的作业 (J)

计划类型 (S): 重复执行 ☒ 已启用 (E)

执行一次

日期 (D): 2007-11-16 时间 (T): 14:28:43

频率

执行 (E): 每周

执行间隔 (I): 1 周, 在

☐ 星期一 (M) ☐ 星期三 (W) ☐ 星期五 (F) ☐ 星期六 (S)

☐ 星期二 (T) ☐ 星期四 (T) ☒ 星期日 (S)

每天频率

☒ 执行一次, 时间为 (A): 4:00:00

☐ 执行间隔 (I): 1 小时

开始时间 (B): 0:00:00 结束时间 (E): 23:59:59

持续时间

开始日期 (D): 2007-11-16 结束日期 (E): 2007-11-16

☒ 无结束日期 (E)

摘要

说明 (E): 在每周 星期日

确定 取消 帮助

5.

维护计划向导

选择维护任务

此计划应该执行哪些任务?


选择一项或多项维护任务 (S):

- ☐ 检查数据库完整性
- ☒ 收缩数据库
- ☒ 重新组织索引
- ☐ 重新生成索引
- ☐ 更新统计信息
- ☐ 清除历史记录
- ☐ 执行 SQL Server 代理作业
- ☐ 备份数据库 (完整)
- ☐ 备份数据库 (差异)
- ☐ 备份数据库 (事务日志)
- ☐ “清除维护”任务


“重新组织索引”任务可以对表和视图的聚集索引和

完成 (C) 下一步 (N) > 取消 帮助 (H) < 上一步 (P)


6.

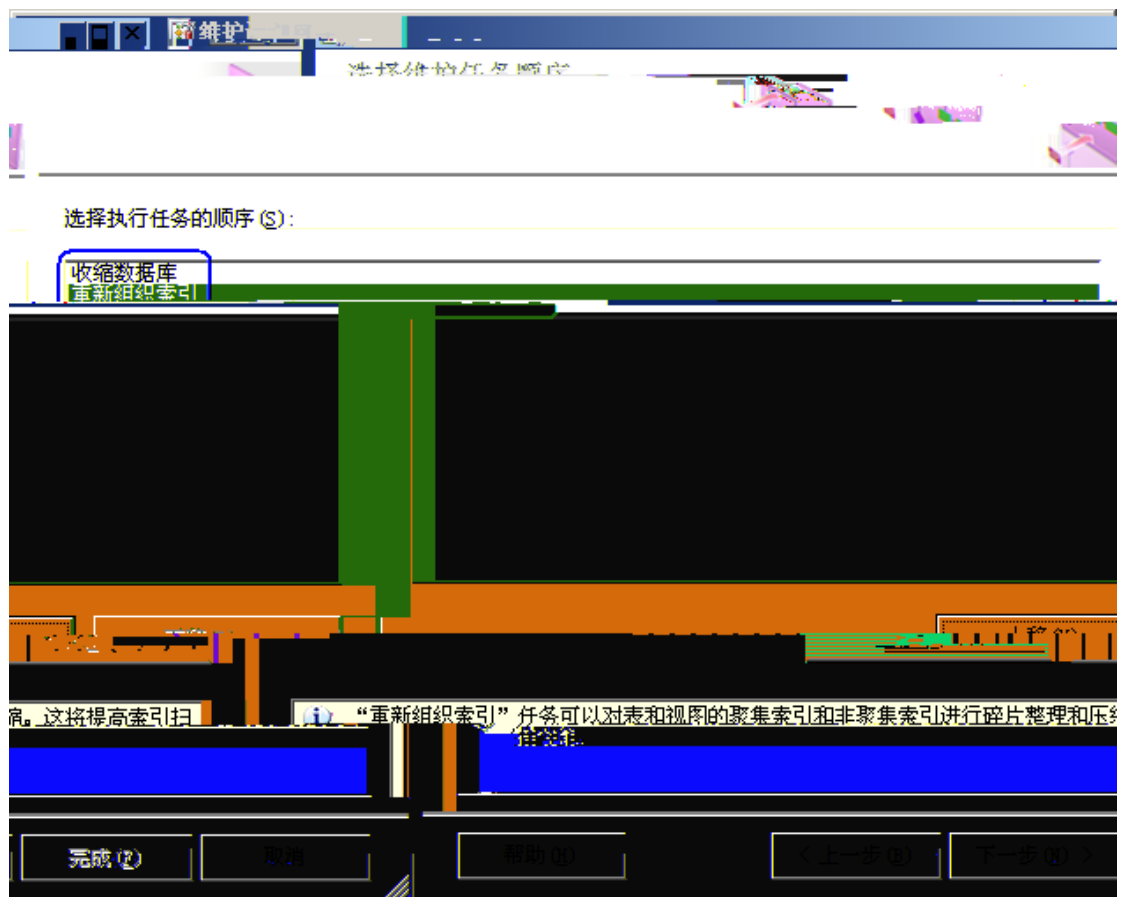

7. “ ” “ ” “ ” SAM SAMDB

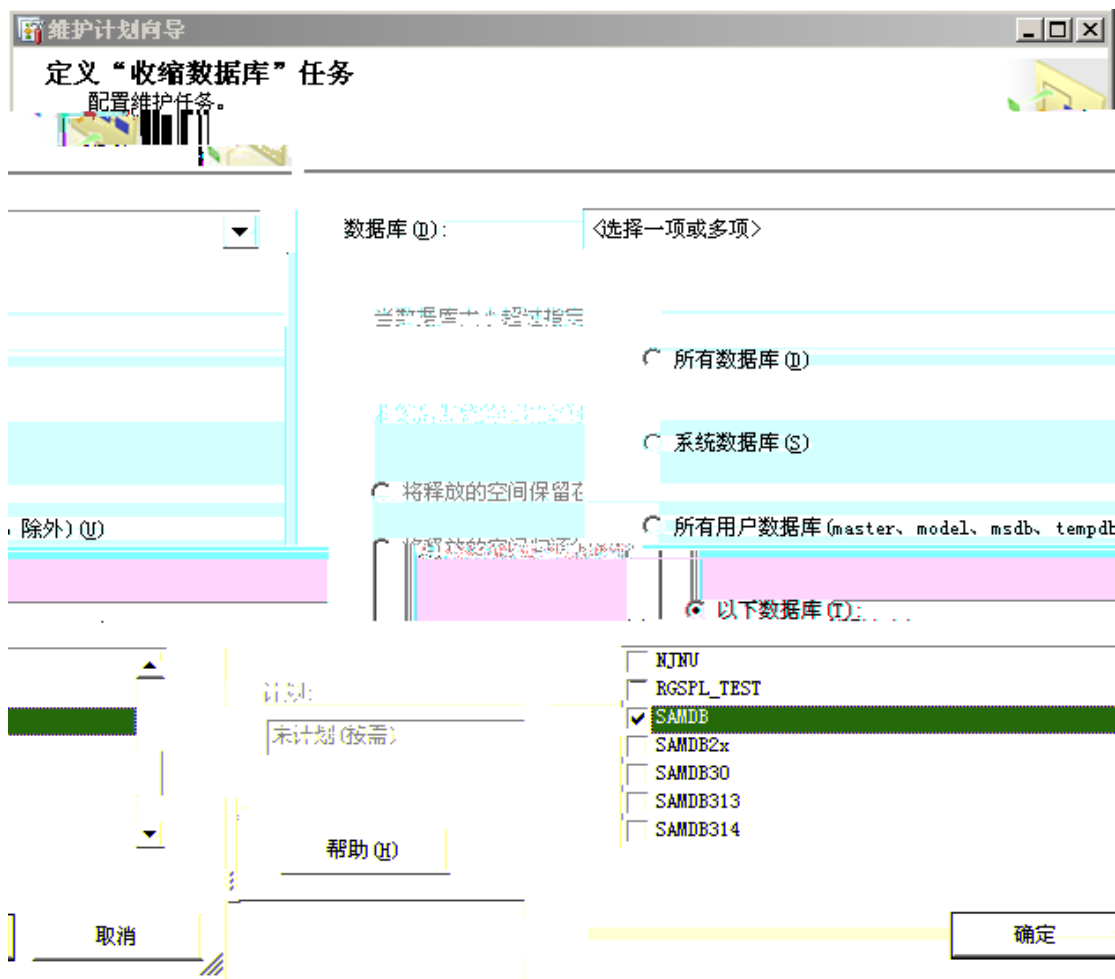

8. “ ” 10240M  
10G “ ” 10%  
“ ”

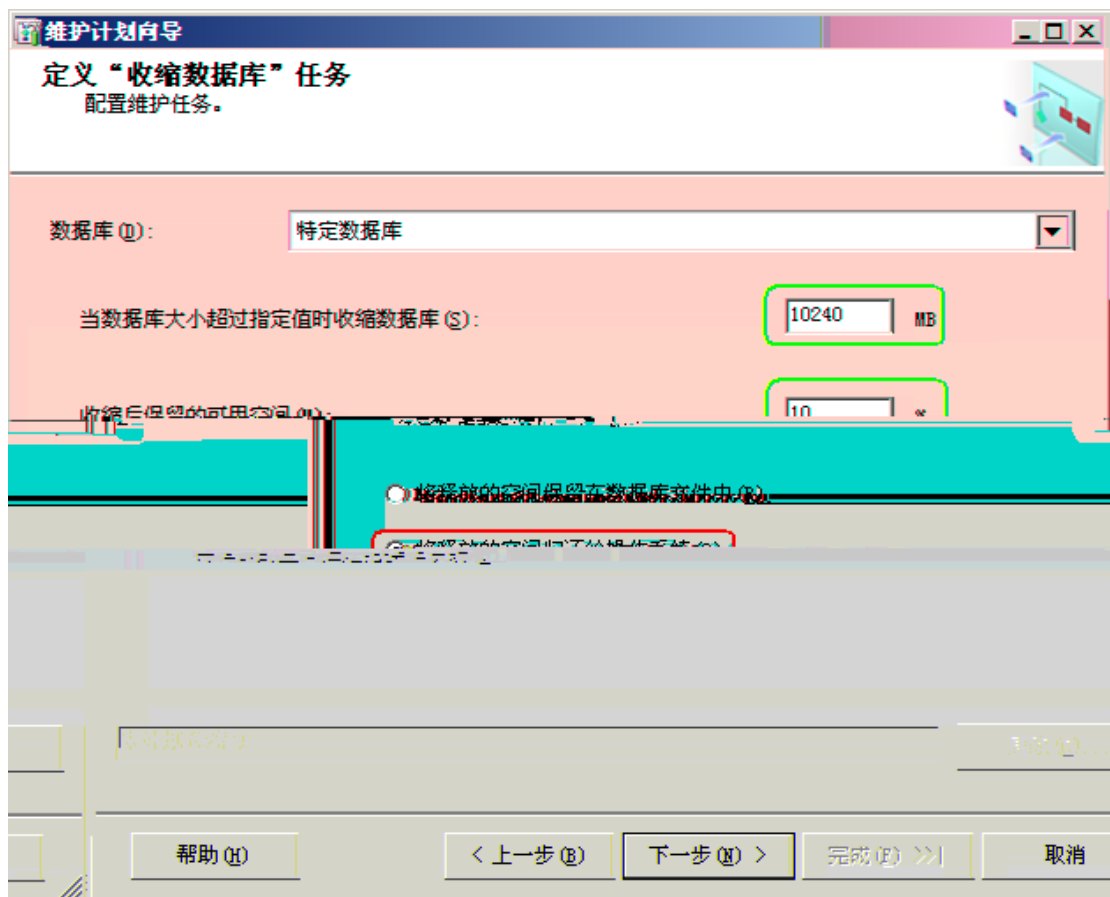


9.

“ ”

SAM

SAMDB

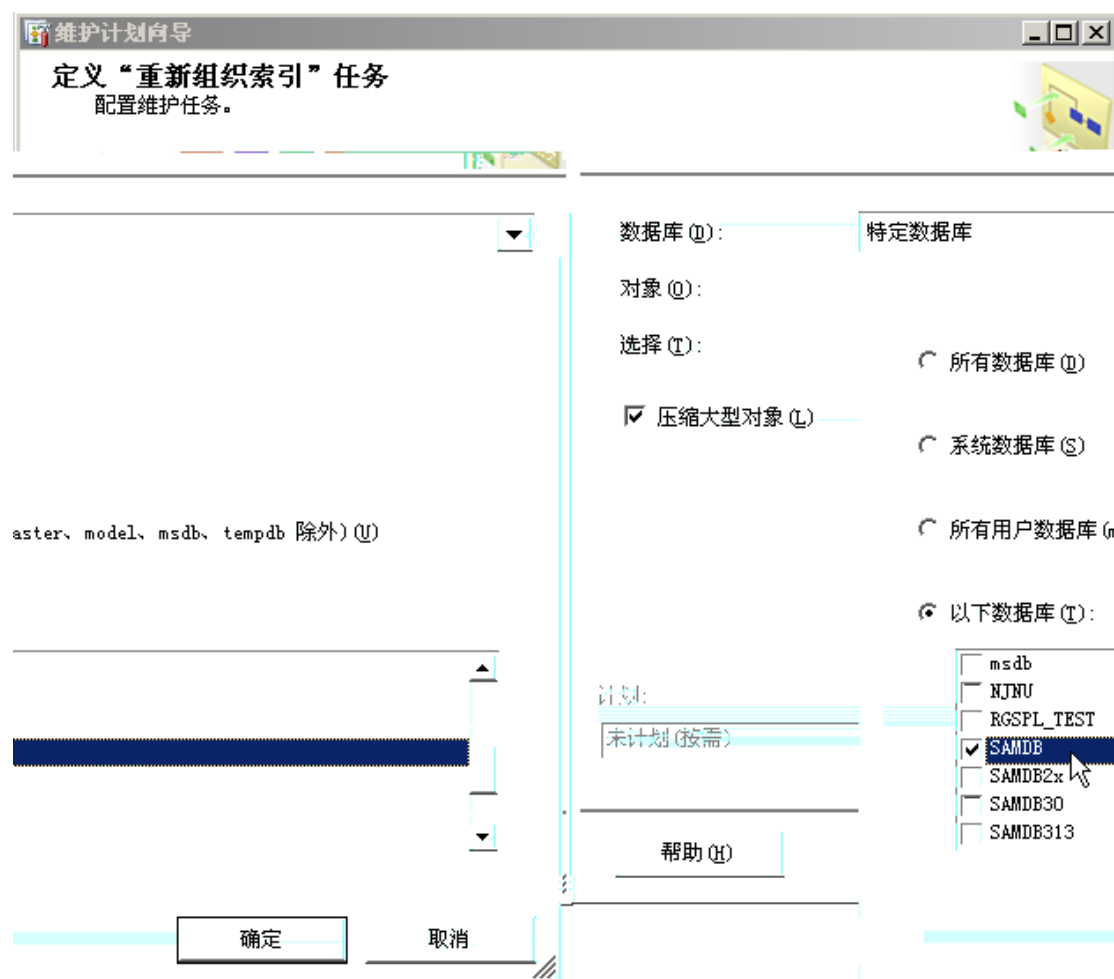

10. “ ” “ ” “ ” “ ” “ ”

“

维护计划向导

定义“重新组织索引”任务  
配置维护任务。

数据库 (D): 特定数据库

对象 (O): 表

选择 (T): 全部

☒ 所有对象 (T)

☐ 以下对象 (S)

- dbo.ACCESS\_CTRL\_POLICY
- dbo.ACCOUNT\_INFO
- dbo.ACCT\_FLOW
- dbo.ACCT\_FLOW\_ACCOUNT\_AGGR
- dbo.ACCT\_FLOW\_AGGR

☐ 压缩大型对象 (L)


计划:

未计划 (按需)

确定 取消

< 上一步 (B) 下一步 (N) > 完成 (F) >> 取消 帮助 (H)

11. “ ”

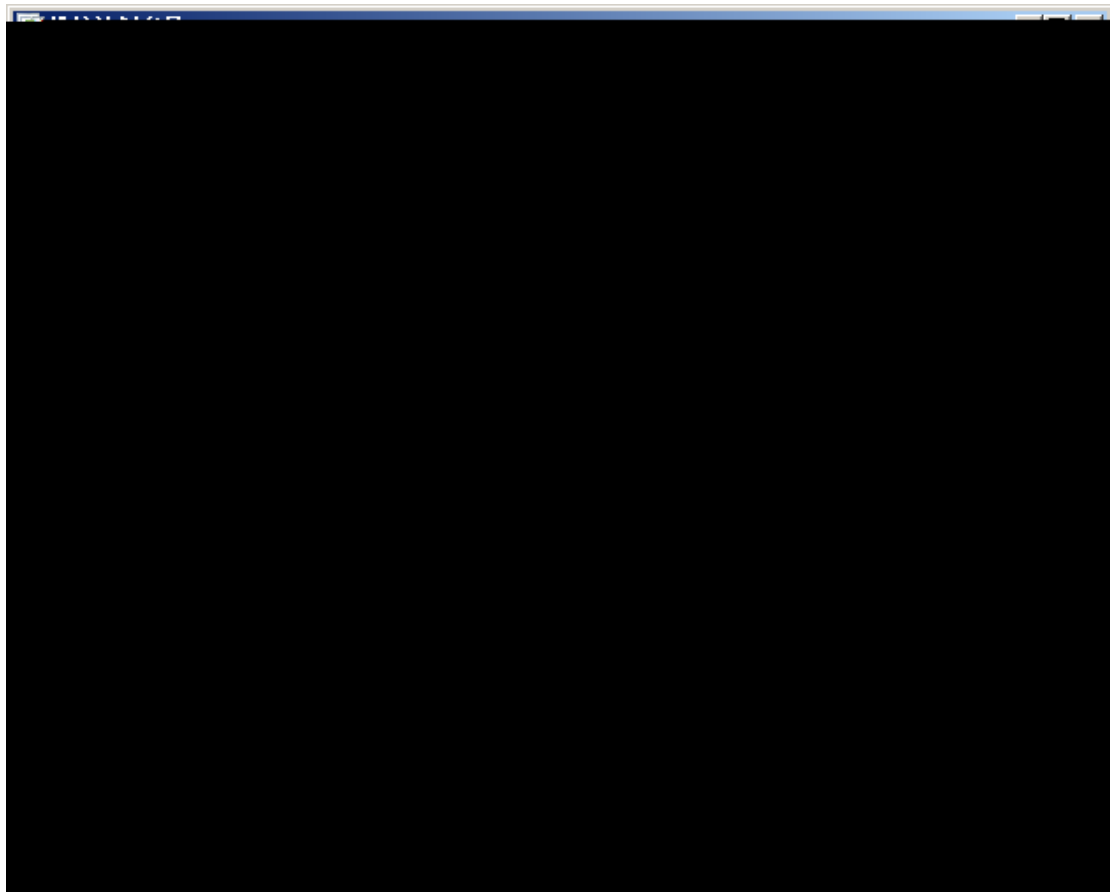


12.

## SQL SERVER Agent


1.

“ ”

2.

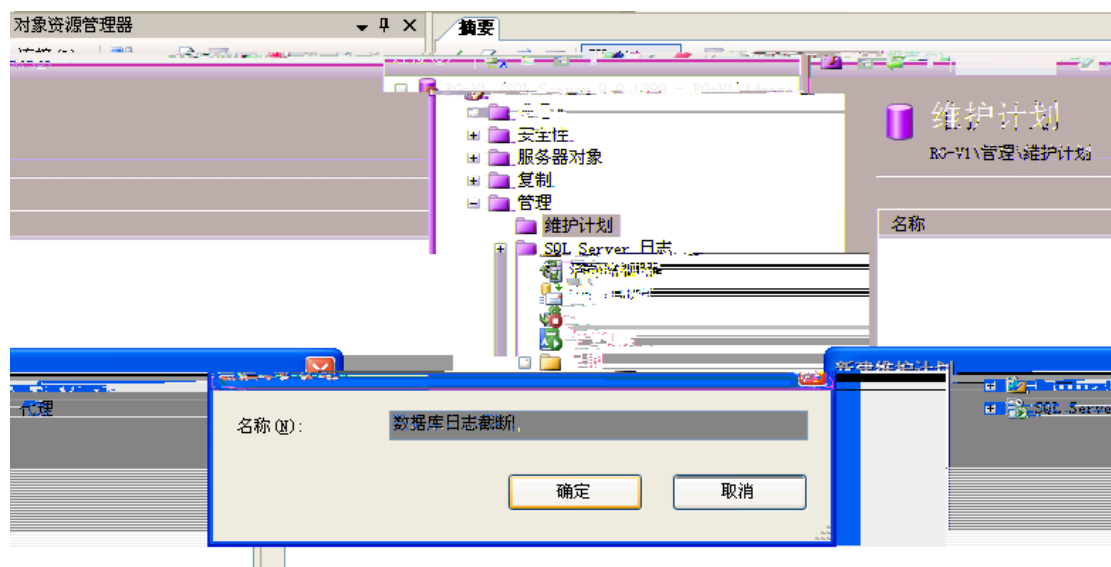


3.

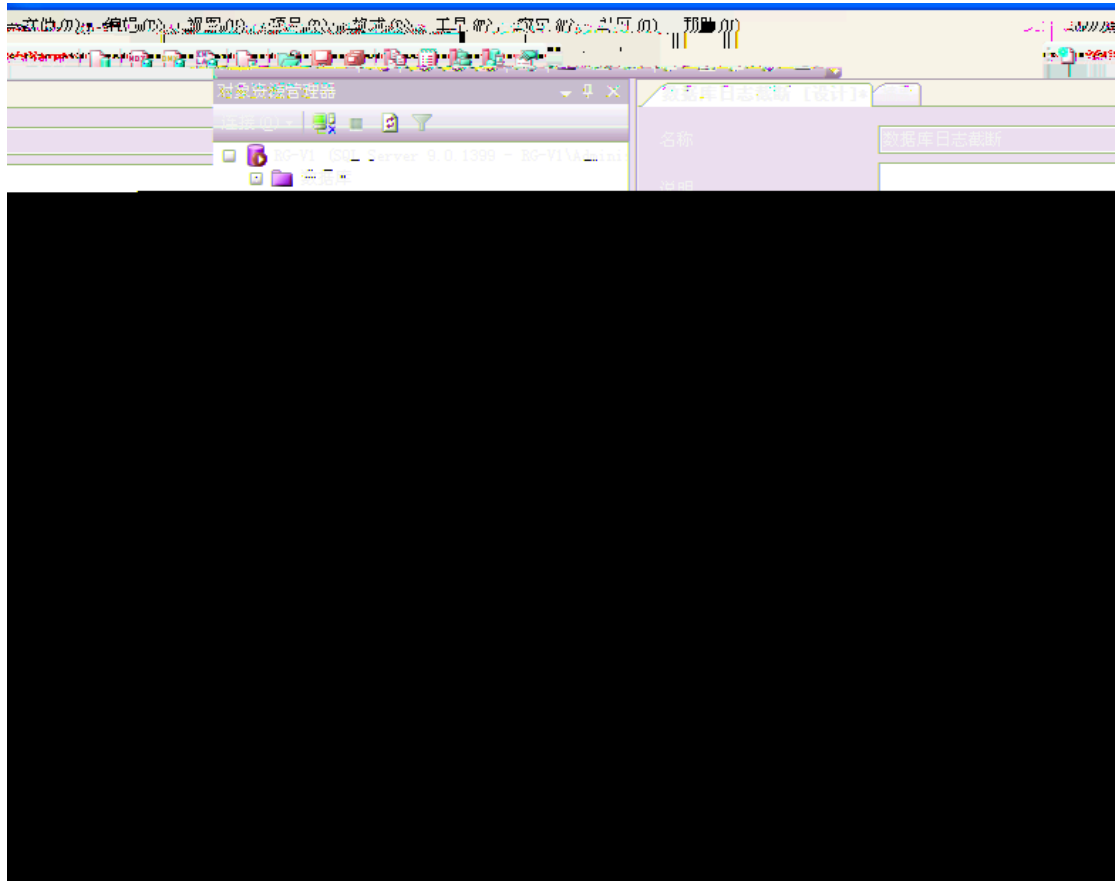


4.




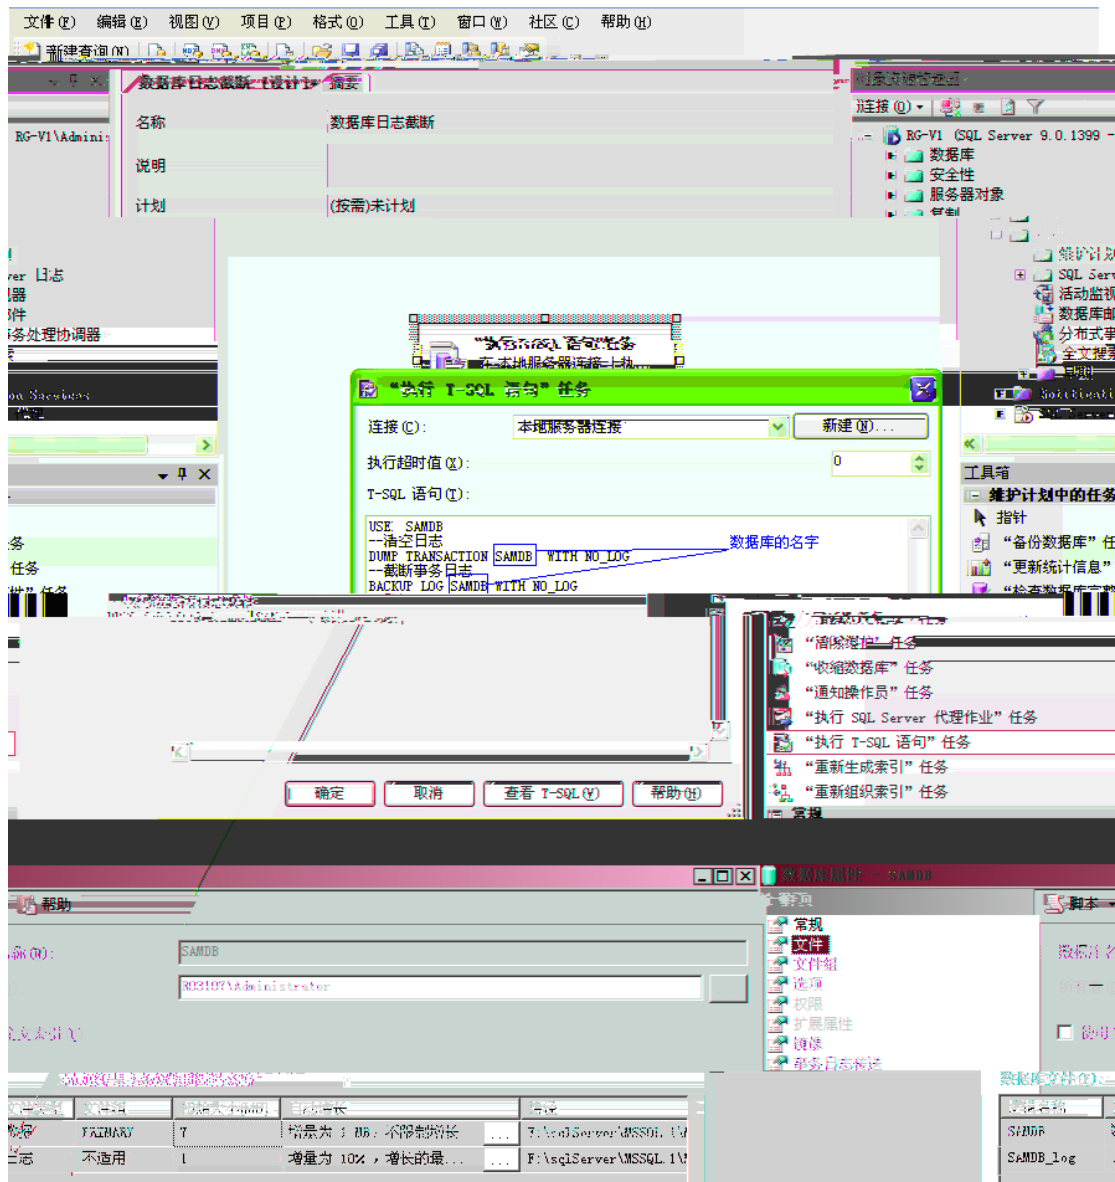

6.

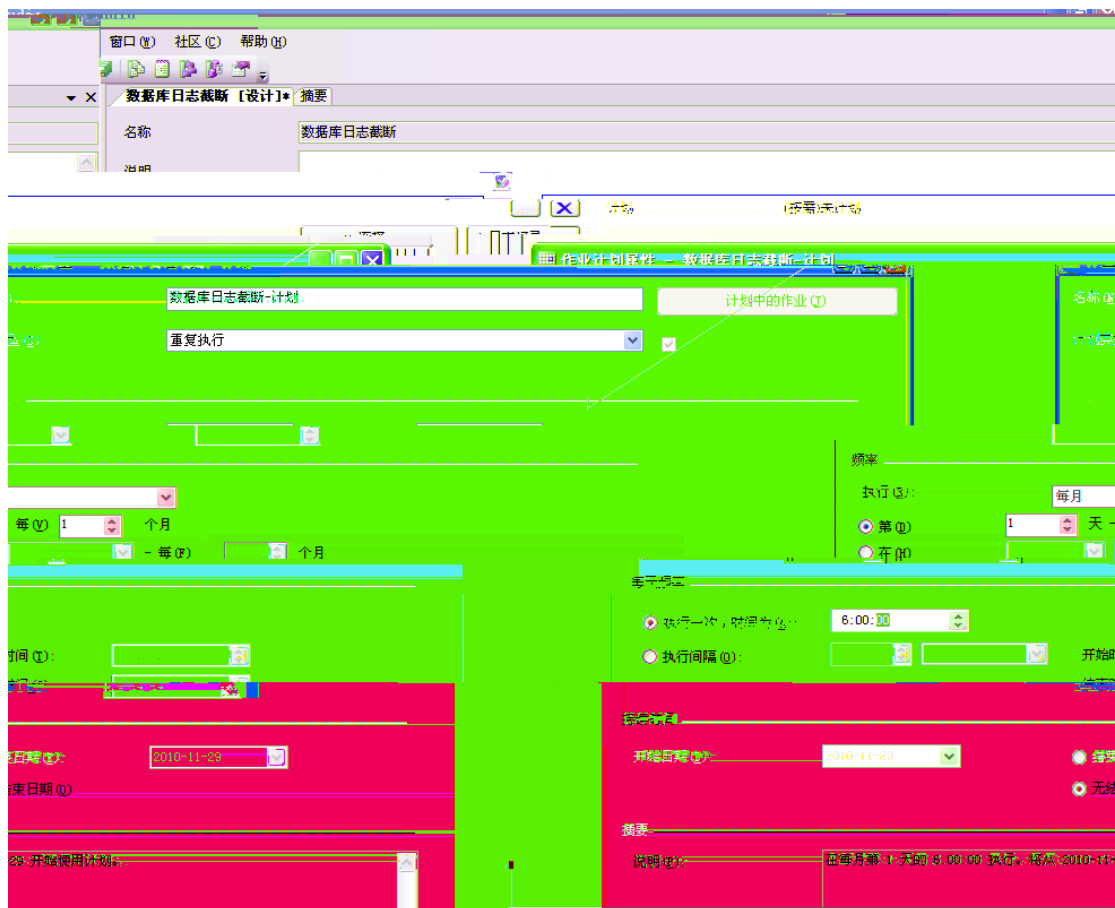


7.

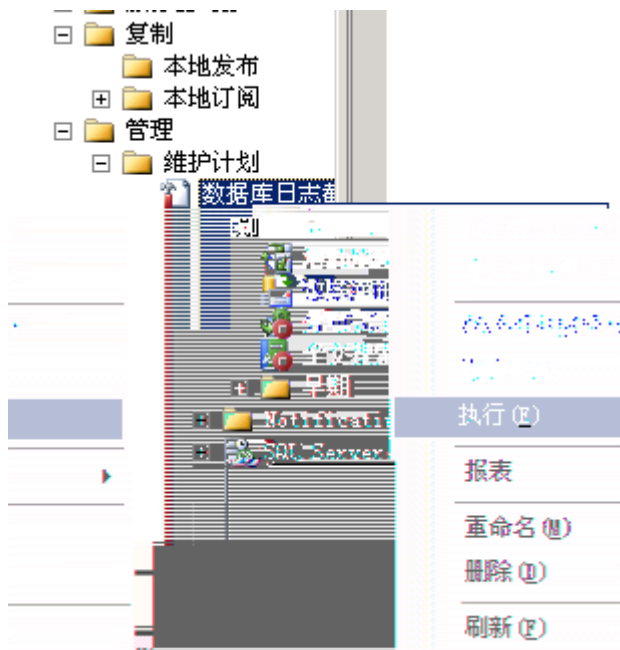

## **1.** SQL Server Management Studio




4.

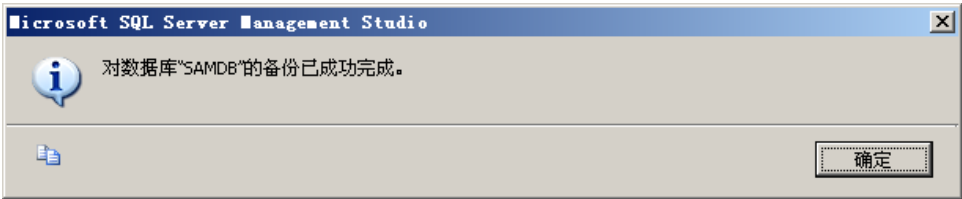


1. SQL Server Managerment Studio

“ ” “ ” “ ”

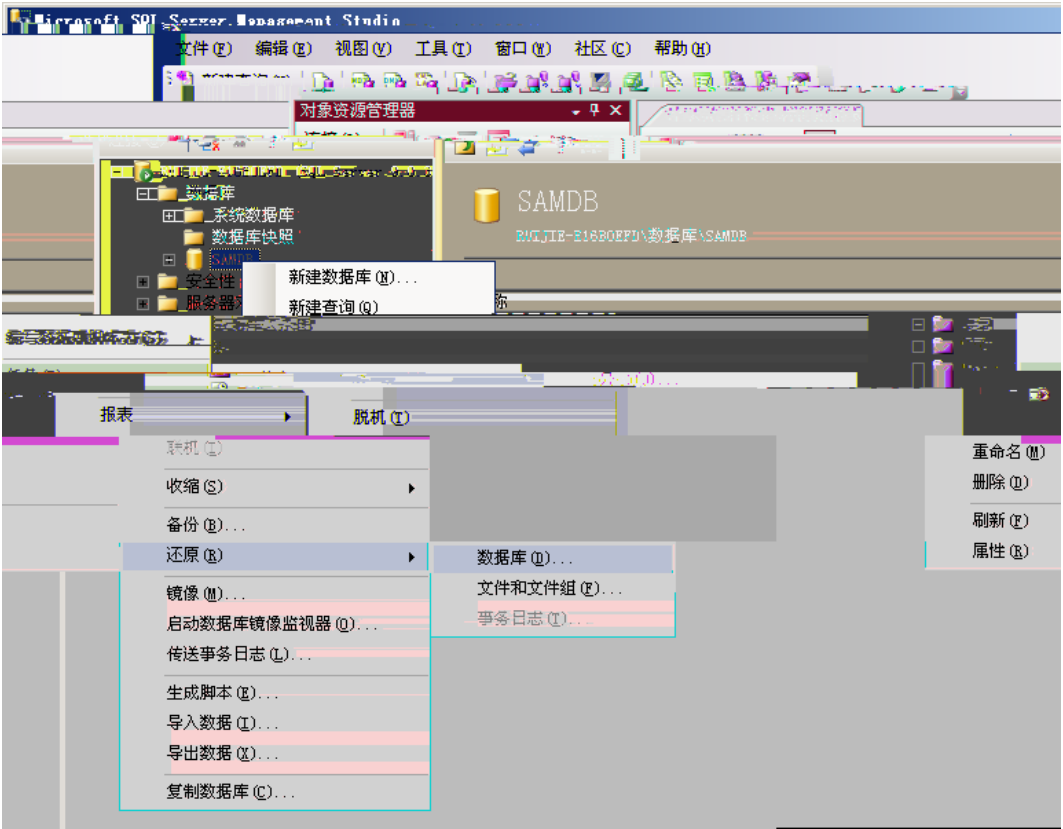


2.

“ ” “ ” “ ”

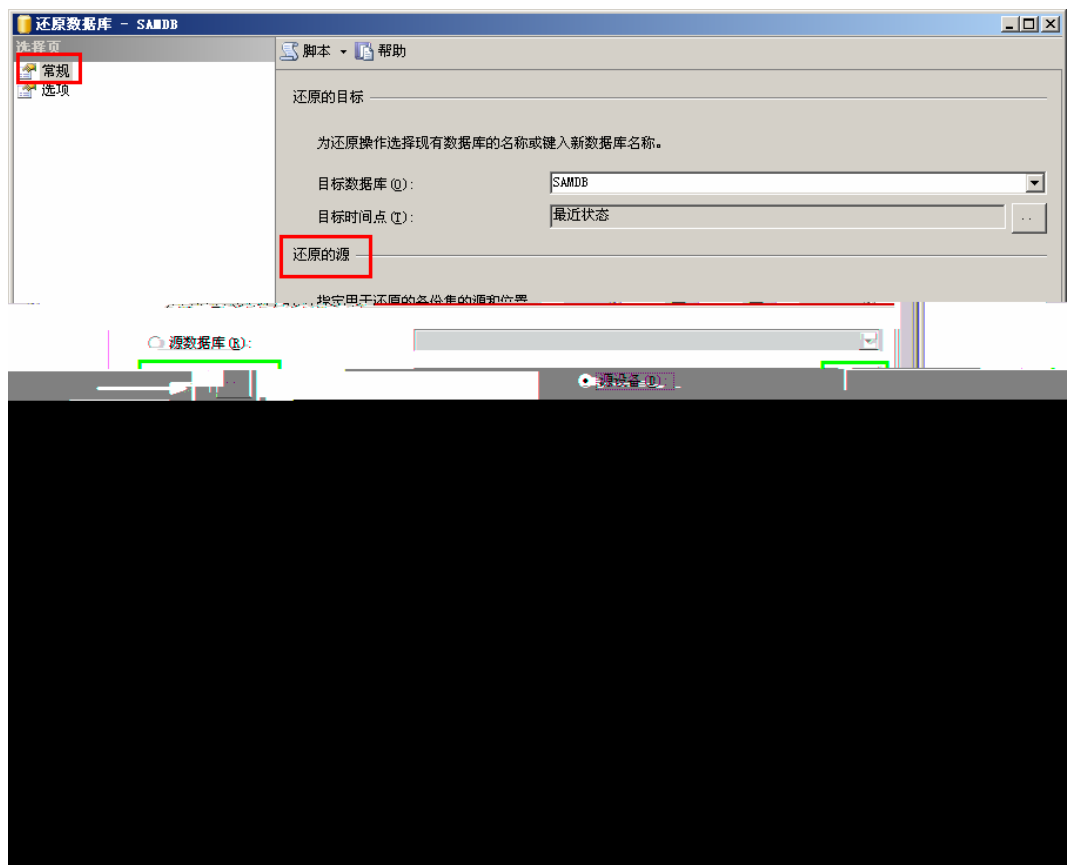


3.


“ ” “ ”

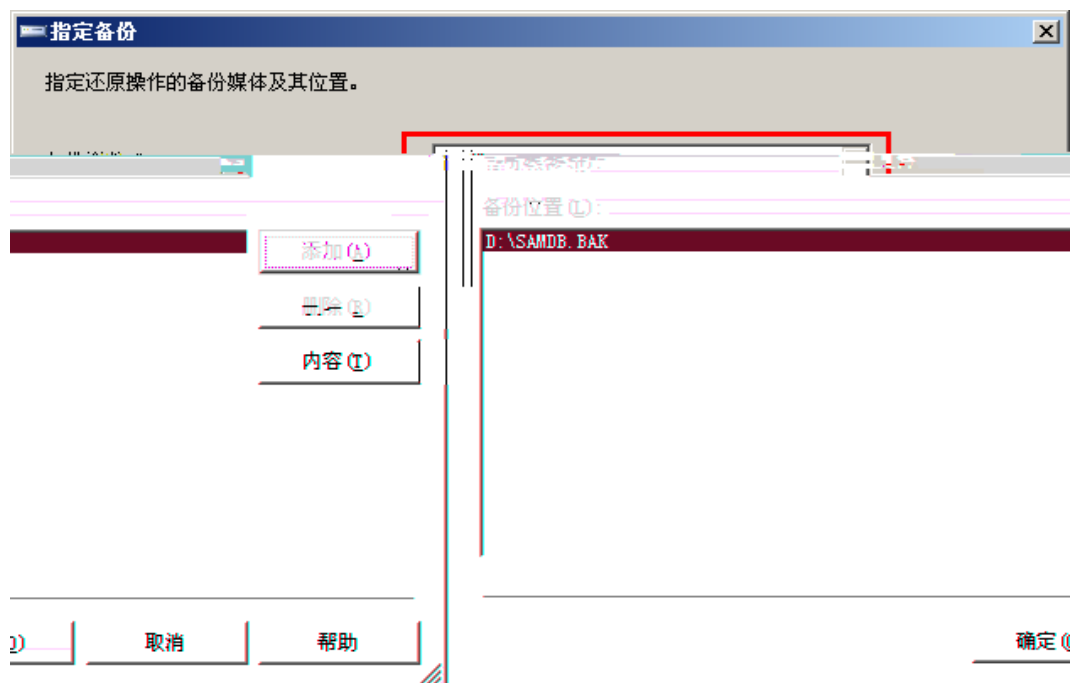

4.

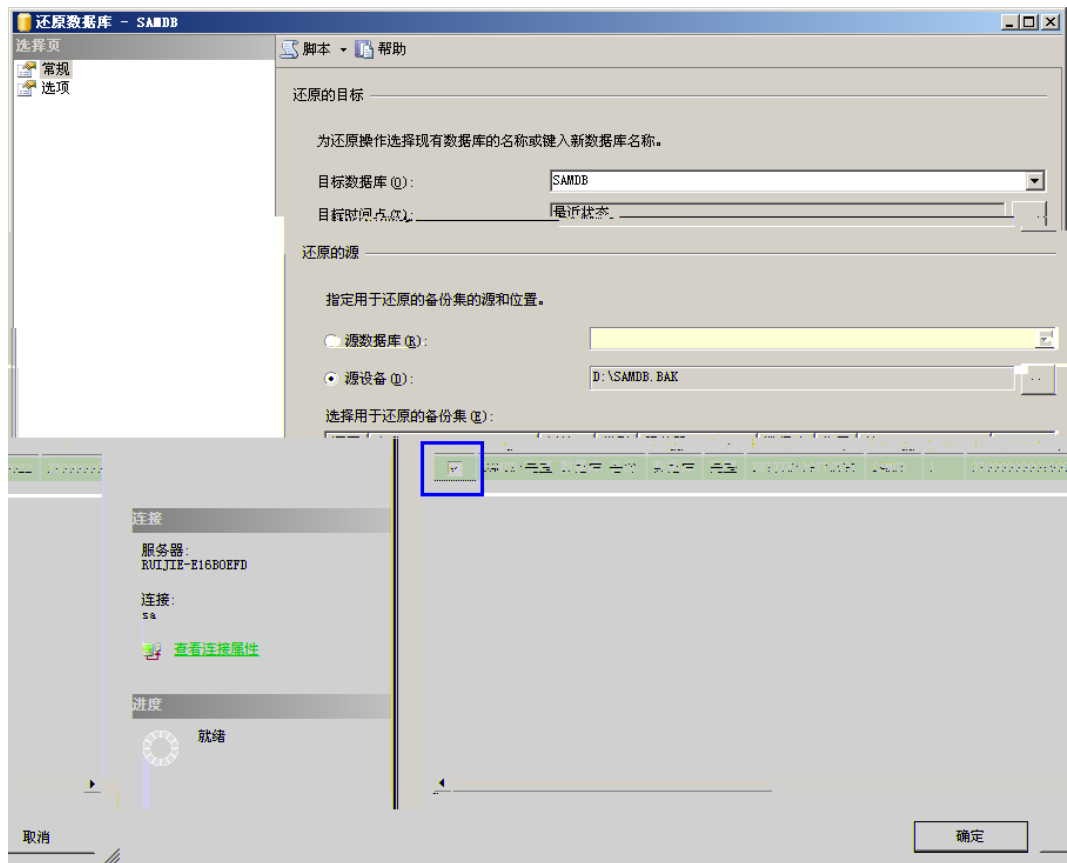

5. “ ”

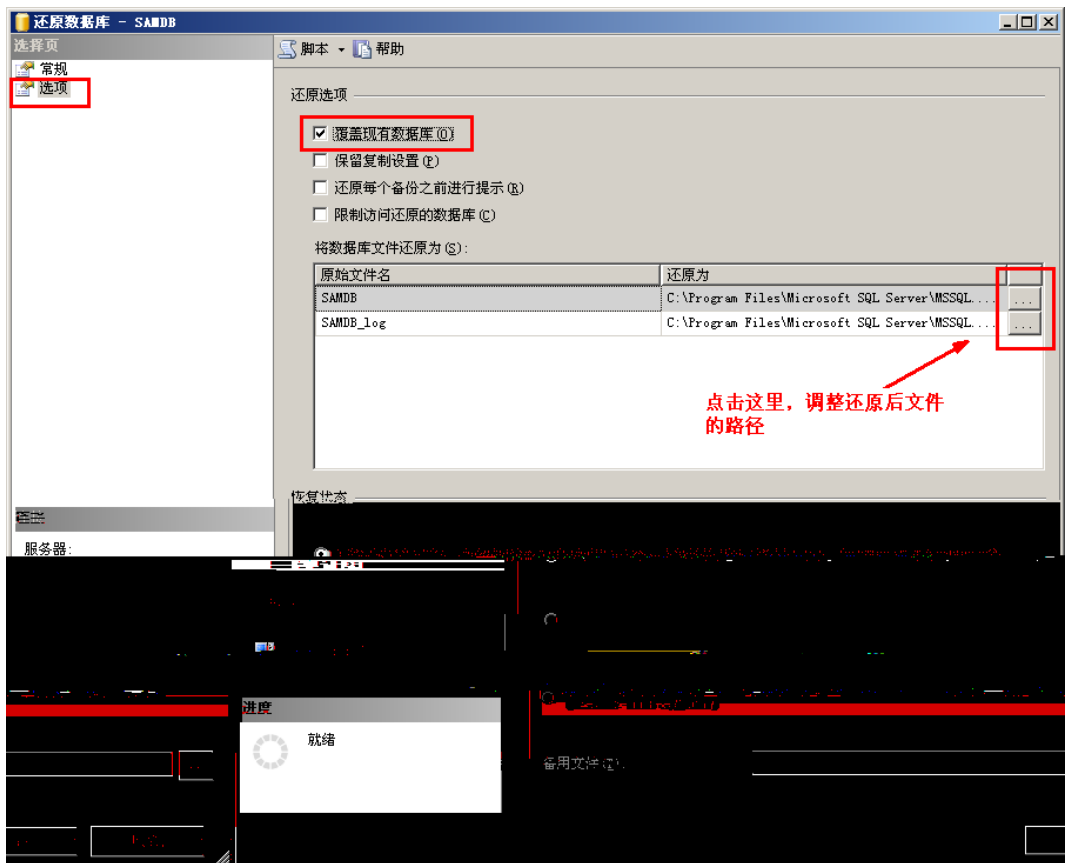


6. “ ”




1.

SQL Server --> Microsoft SQL Server-->SQL  
--> --> -->

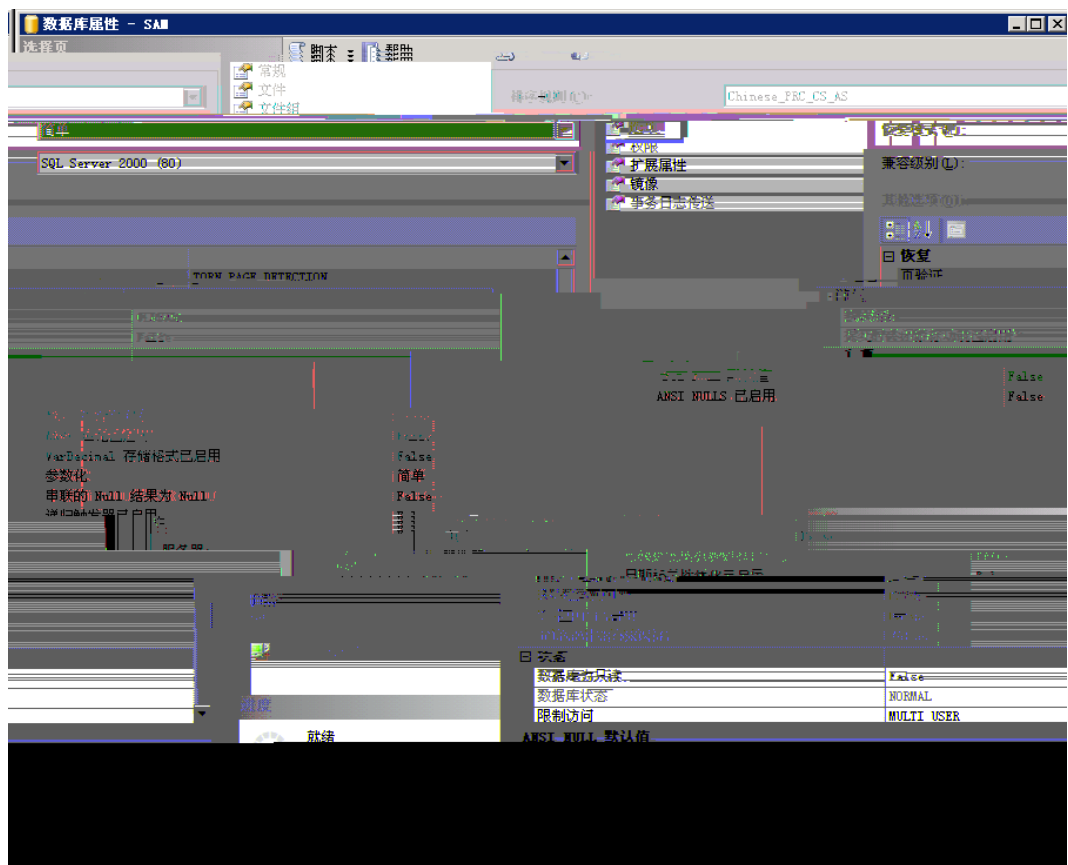

2.

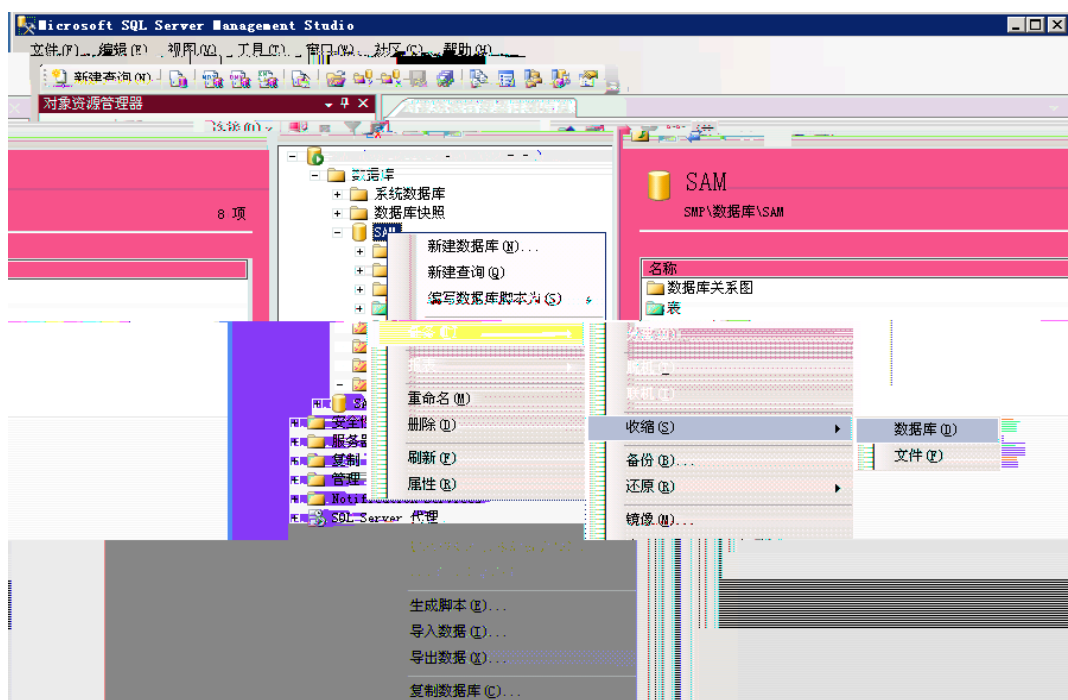



3.

->

“

”

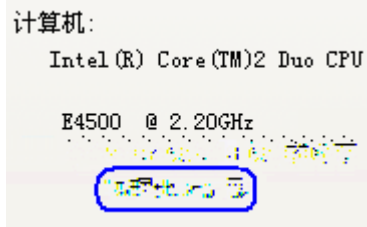

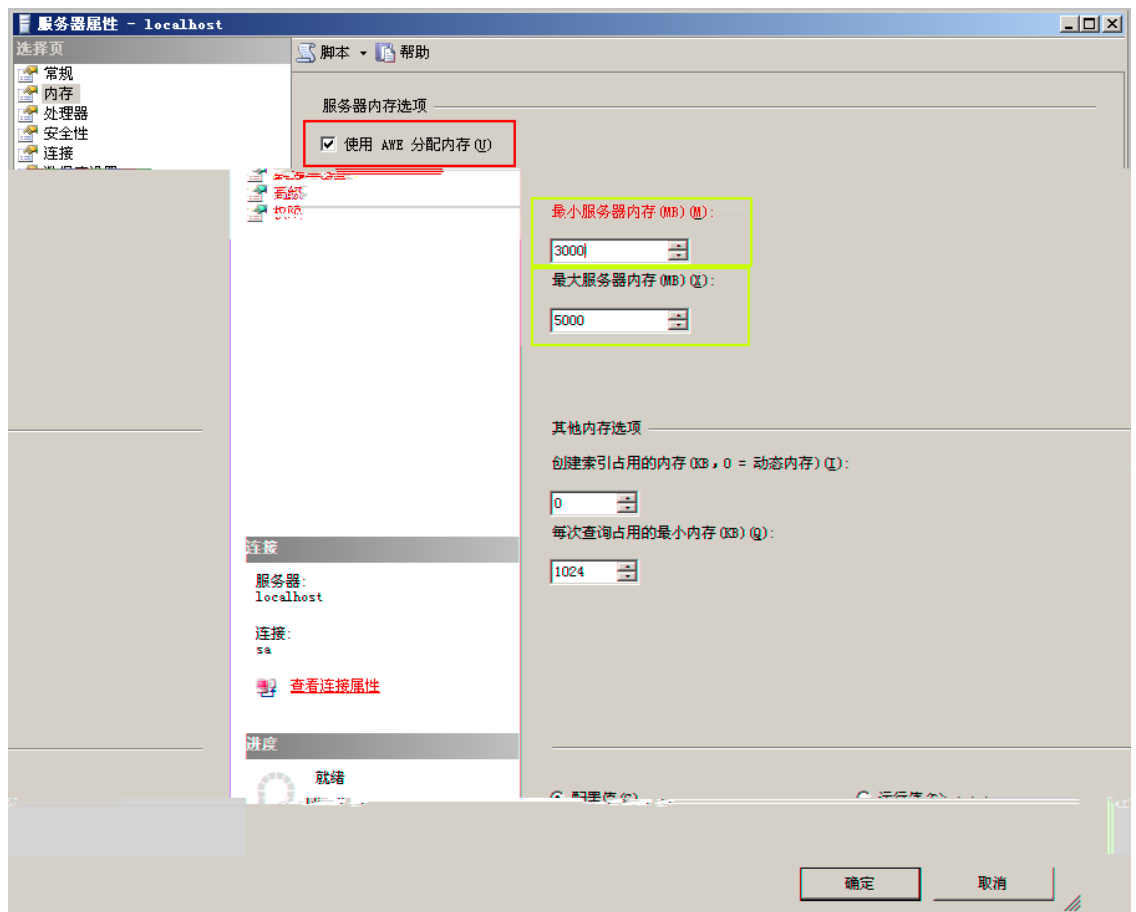

4GB


2G

“

AWE

”


1GB



4GB

“ AWE ”

1GB

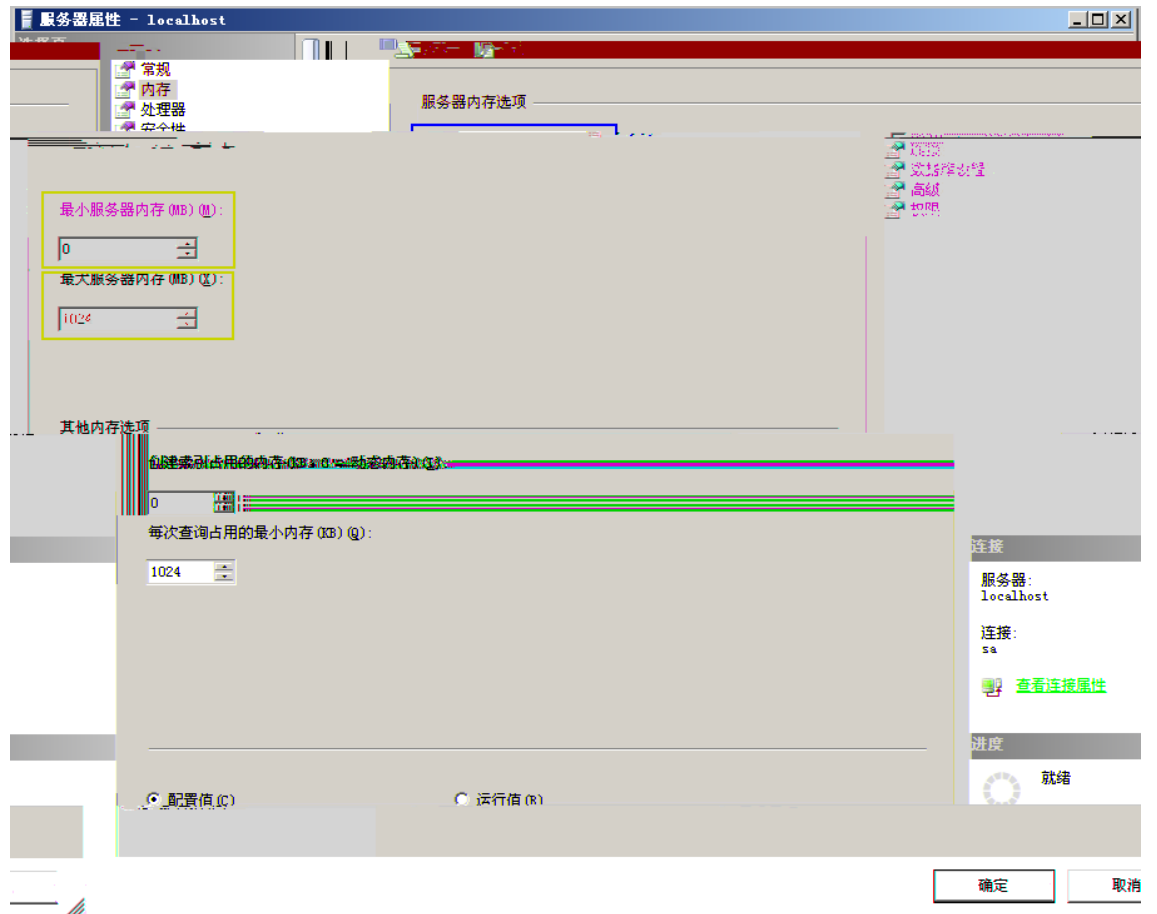


“ ”

计算机:  
Intel(R) Core(TM)2 Duo CPU  
E4500 @ 2.20GHz  
2.20 GHz 1.05 GB 的内存

1.

“ ”

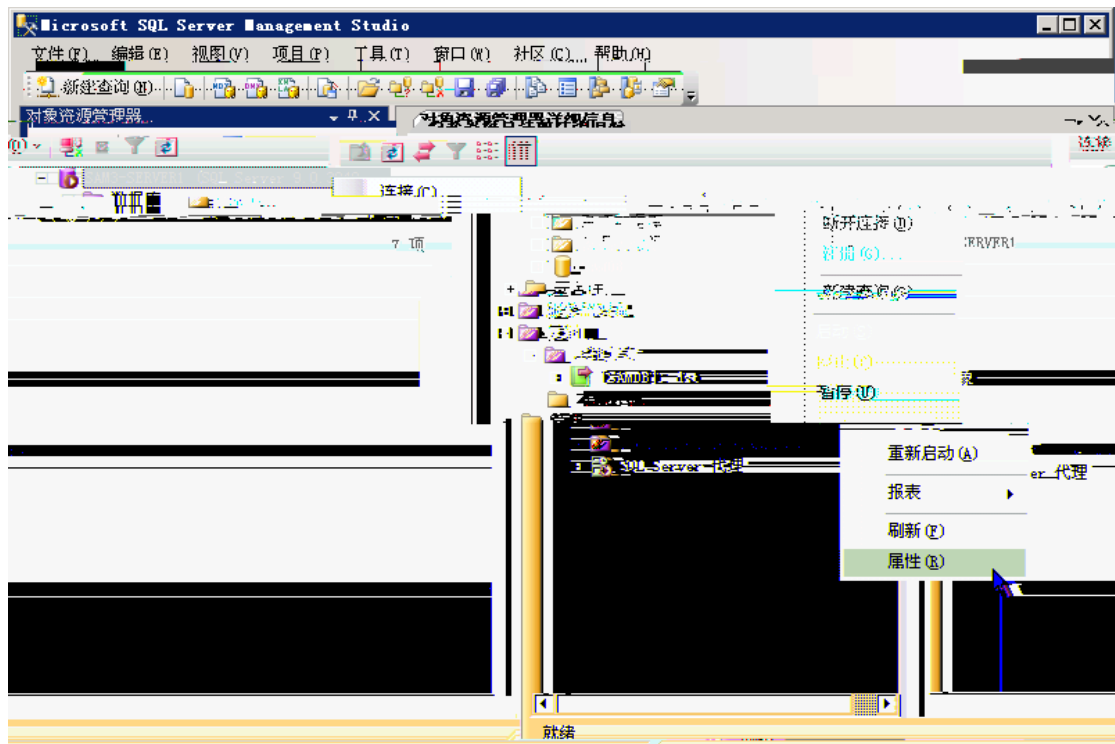


2. “ ”

3. “ ” “ ” “ ”

“ AWE ”

1GB

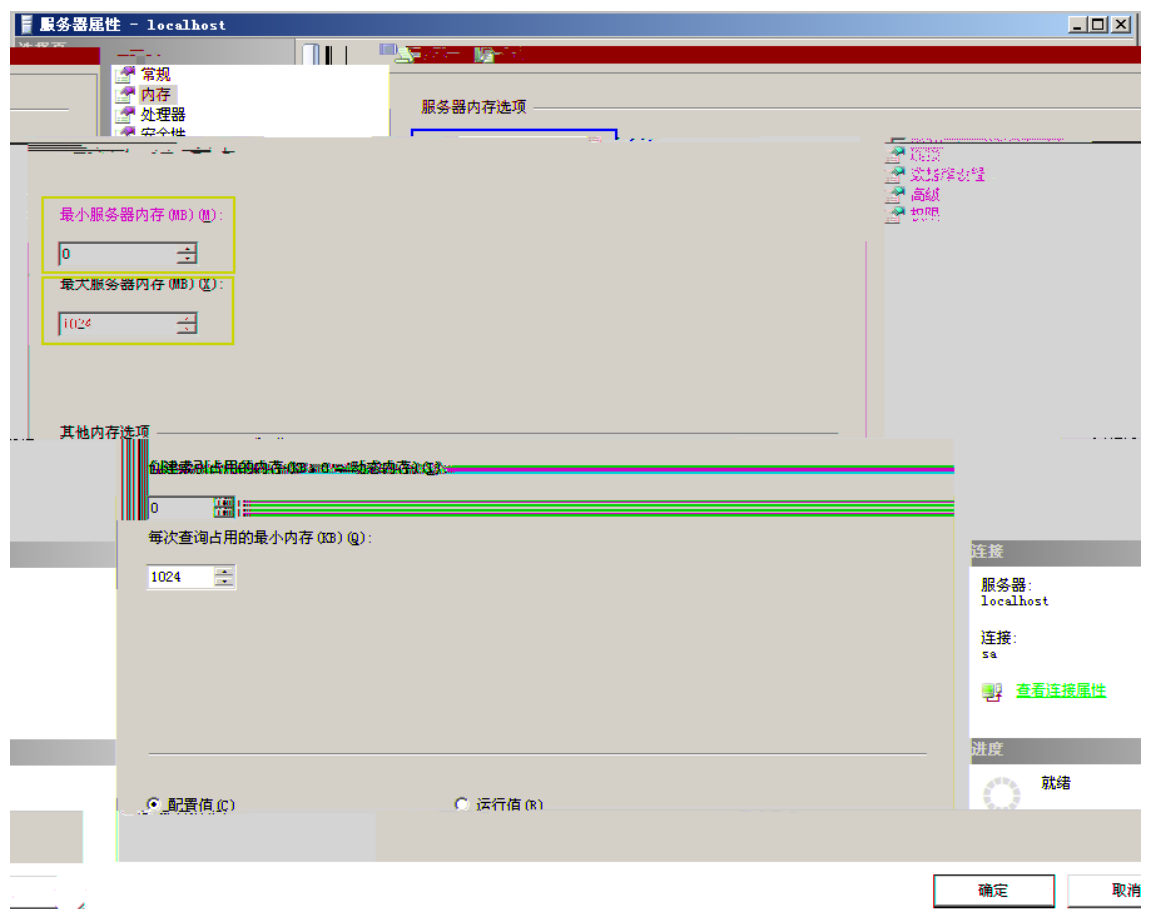

, 2G

RGAC

RGAC RG-SAM RGAC .doc 3.4 “ ”

windows

- 1 Guest Guest Guest
- 2 Guest Duplicate User
- 3 Administrators
- 5 Everyone
- 6 20 20
- 7 3

TCurrentVersionWinlogonDont- REG\_SZ 1

1

2

3

4

5

42

6

1. sp . , sp .  
sp , . sp  
<http://www.microsoft.com/downloads/Popular.aspx?displaylang=zh-cn> ,  
.
2. windows . , sp , 1  
.  
windows windows update ,  
windows update , .
3.  
a) IIS . IIS .  
IIS: / / windows , Internet  
(IIS) , , .  
b) telnet . Telnet ,  
 , telnet ,  
c) messenger . b), , ,

# SQL SERVER

- 1. SQL SERVER . SP4, :<http://www.microsoft.com/downloads/Popular.aspx?displaylang=zh-cn>
- 2. . sa , sa .
- 3. . .
- 4. , , IP , IP .

# RG-SAM

- 1. RG-SAM , . RG-SAM .
- 2. RG-SAM
- 3. ACL
- 4. RG-SAM IP ( , ), RG-SAM , IP , IP .
- 5. SAM “ ” SAM

UDP — Web83 Tm( )ITJET EMC /133>> BDC BT/F2 10

TCP  
P  
P

|     |                                  |                   |
|-----|----------------------------------|-------------------|
| SQL | \MSSQL\Binn\sqlservr.exe         | SQL Server 2000   |
| SQL | \MSSQL.1\MSSQL\Binn\sqlservr.exe | (SQL Server 2005) |
| SQL | \MSSQL.1\MSSQL\Binn\sqlservr.exe | (SQL Server 2008) |
|     |                                  |                   |
| SAM | \RGSSAMService.exe               |                   |
| SAM | \RGNSMng.exe                     |                   |
| SAM | \RG-Service-Mon.exe              |                   |

1     \jboss\server\default\deploy\jms     uil2-service.xml     " BindAddress  
       NTD   SMP                           IP

```

<mbean code="org.jboss.mq.il.uil2.UILServerILService"
      name="jboss.mq:service=InvocationLayer,type=UIL2">

  <!-- The server chain -->
  <depends optional-attribute-name="Invoker">jboss.mq:service=Invoker</depends>
  <!-- JNDI binding -->
  <!-- JNDI binding for XA -->
  <!-- The bind address -->
  <!-- The bind port -->
  <!-- The ping period in millis -->
  <!-- Whether tcp/ip does not wait for
  <!-- Used to disconnect the client on
  <!-- Ensure this is greater than the r
  <!-- Used to disconnect the client on
  <!-- Ensure this is greater than the r
  <!-- The size of the buffer (in bytes)
  <!-- The buffer is flushed after each
  <!-- Large messages may block the ping
  <!-- A pong is simulated after each ch
  <!-- It must be larger than the buffer

  </mbean>

```

指定"BindAddress"属性为能与NTD  
 正常通信的网卡ip

2     SAM                           RGSAM.bat                   -Djava.rmi.server.hostname=     IP

1)                           RGSAM.bat



```
-start org.jboss.Main params --host =能通信的IP -stop org.jboss.Main -method systemExit
```

➤ -start org.jboss.Main 启动 jboss 服务

params --host 能通信的IP

请记录在案